

يوتسم دي دحت كيلي ع بجي ،ديج مدختسم مسا عاشنإب موقت ام دنع .ةيداعال وأ ةزيمل
تقوي أ يف مهب صاخلا لوصولا يوتسم ريغت كنكمي نكلو ،مهتازايتما

ةسسؤلما يف رتويبمك وأ ةومجمي أ نم تانايبلا ضرعو لمالكلا مكحتلا ني لوؤسملل نكمي
ني مدختسم الامساو مئاوقلاو تاسايسلاو تاعومجملا يلع تاريغيغت اءارءاو

هنكمي ال نكلو يداع باسح يلا رءا لوؤسم ةبتر ضفخ لوؤسملل نكمي :ةظءالم
هسفن ةبتر ضيفخت

مت يتي تاعومجملل طقف تامولعمل ضرع يداعلا وأ زيمل ريغ مدختسملا باسحل نكمي
نأ اما راخي كيدل نوكي ،ديج مدختسم باسح عاشنإب موقت ام دنع .اهيلا لوصولا قح اهحنم
تاعومجملا دي دحت كنكمي ،تازايتمالا هذه مهحنمب موقت مل اذا .لوؤسمل تازايتما مهحنمت
اهيلا لوصولا مهنكمي يتي تالا مئاوقلاو جهنلاو

لمواعلا ةيئانث ةقءاصم

ةدمتعمل ريغ تالواءالم دض نامألا نم ةيفاضا ةقبط لمواعلا ةيئانث ةقءاصملا رفوت
ةنمألا ةياهنلا ةطقن مكحت ةدحو باسح يلا لوصول

نيوكتلا

تازايتما

تاباسحلا يلا لاقتنالا كنكمي ،لوؤسمل تازايتما حنم وأ تانوذال ريغيغتلا ،الوؤسم تنك اذا
> ةروصل هذه عءار ،تانوذال رايتءاو مدختسملا باسح دي دحت نومدختسملا

Privileges

[Grant Administrator Privileges](#) [Remove All Privileges](#) [Revert Changes](#) [Save Changes](#)

Allow this user to fetch files (including Connector diagnostics) from the selected groups.

Allow this user to see command line data from the selected groups.

Allow this user to set Endpoint isolation status for the selected groups.

Groups [Clear](#) [Select Groups](#)

None

For the selected groups: [Auto-Select Policies](#) [Auto-Select Policies and Lists](#)

Policies [Clear](#) [Select Policies](#)

None

لاقتنالا كنكمي ،كلذب مايقلل ،رءا لوؤسمل لوؤسمل تازايتما لاطبأ لوؤسملل نكمي امك
ةروصل يف حضوره امك ،رايخلا يلع عالطالل لوؤسمل باسح يلا

Privileges

Revoke Administrator Privileges

Administrator

All Groups

All Policies


All Outbreak Control Lists

في تقويم الـ نيزختلا ةركاذ في تانايبلا ضعبل مدختسملا تانوذأ ريغت دنع :ةظحالم
دعي مل ولو ىتح تقولا نم ةرتفل اهتفرىل ع ارداق مدختسملا لظي ،ثحبلا جئاتن
تقويم الـ نيزختلا ةركاذ شي دحت متي ،تالاحلا مظعم في .ةومجم ىلا لوصولا قح هيدل
قئاق د 5 دعب

لمواعلا ةيئانث ةقداصم

اذه عبتا ،اذه نيوكتل .يجراخ لوصول بلط مادختساب ةقداصملا ضرغ ةزيملا هذه كل حيتت
ءارجلا:

"ةنمآلا ةياهنلا ةطقن مكحت ةدحو" نم نميألا يولعلا ءزجلا في "يباسح" ىلا لقتنا .1 ةوطخلا
ةروصللا هذه في امك

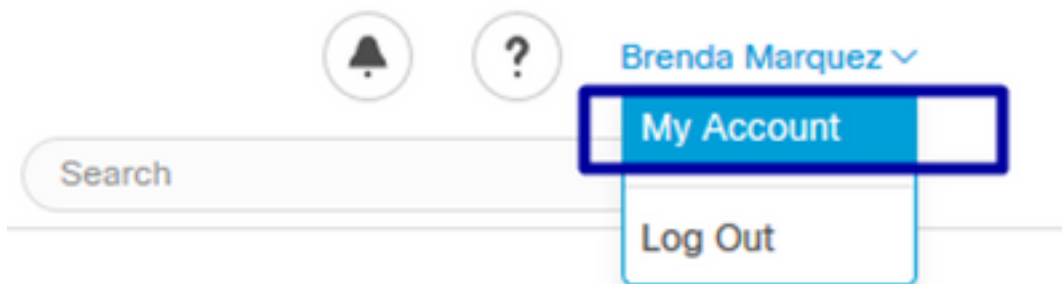

نيمكمتل ةبولطم تاوطخ ثالث عم حضاو ليلد ىرتل ،ةرادا دح ،تاداعلا مسق في .2 ةوطخلا
ةروصللا في حضم وه امك ،ةزيملا هذه

Settings

Two-Factor Authentication [Manage](#)

Remote File Fetch Must enable two-factor authentication

Command Line Must enable two-factor authentication

Endpoint Isolation Enabled

Time Zone

Casebook [Authorize](#) [Learn More about Casebook](#)

Google Analytics [Opt Out](#) [?](#)

ة: عيرس تاوطخ تال ت كانه 3. ةوطخل


يذل iPhone و Android لئغشتلا ماظن نم هيلع لوصحلا كنكمي يذلا لئزنتلا قدصم (أ) QR زمر عاشنإل ةلومحملات اوهلا نم ي لولح لئصافت دح. Google قدصم لئغشت هنكمي ةروصلال هذه عجار. لئزنتلا ةحفص لئك هئجوت ةداعإب موقبي


Two-Factor Authentication

▼ Step 1: Download Authenticator

Two-factor authentication gives you a second line of defense against unauthorized attempts to access your account.

To enable two-factor authentication, you must have a device that can run Google Authenticator or another RFC 6238-compatible app.

Android  [Details](#)

iPhone  [Details](#)

► Step 2: Scan QR Code

► Step 3: Enable Two-Factor Authentication

[Return](#)

قدصم ةطساوب ايئوض ءحسم متي نأ بءي و QR زمر عاشنإل ي ف دح، ايئوض QR زمر ءحسم (ب) ةروصلال هذه ي ف ءضوم وه امك Google

Two-Factor Authentication

▶ Step 1: Download Authenticator

▼ Step 2: Scan QR Code



Sample

Generate QR Code

Warning: This QR code is your personal one-time code. This should be kept secure. Generate the QR code only when you have some privacy and are ready.

Add this two-factor authentication account to your device

Click "Generate QR Code" and scan the generated QR code into Google Authenticator or another RFC 6238-compatible app.

If you cannot access your device

After completing Step 2, you will be given a set of backup codes. You can use a backup code to access your account and disable two-factor authentication until you can re-enable it with a new device. If you do not have access to any backup codes, contact Support.

Note: We do not recommend storing your Cisco Security password on the same device as your authenticator application. If your Cisco Security password is on the same device as your authenticator app and you lose your device, you should contact Support immediately to have your account password reset.

▶ Step 3: Enable Two-Factor Authentication

Return

يولخل كفتاه في كبا صاخلا قيصملا قيبطت حتفولم اوعلا يئانث قيصم نيكم مت (ج) ةروصل في حضورم وه امك، ةيملعمل هذه اهانل نيكم تدح. ققحتلال زمر لاخلاداو.

Two-Factor Authentication

▶ Step 1: Download Authenticator

▶ Step 2: Scan QR Code

▼ Step 3: Enable Two-Factor Authentication

1. Open your Authenticator app.
2. Enter the verification code from Authenticator.

Enter the verification code from Authenticator.

Please enter verification code

Enable

Return

لى اخصن تدح. يطايتحال اخصنلا زومر ضعب كي طعت اهانل، كلذ متي نأ درجمب 4 ةوطخلال لاثمك ةروصل عاجار، مهظفحل ةظفاحال.

Two-Factor Authentication

▶ Step 1: Download Authenticator

▶ Step 2: Scan QR Code

▼ Step 3: Enable Two-Factor Authentication

Two-Factor Authentication has been enabled. Here are your backup codes.

Warning: This is the only time that the backup codes are shown. If you do not make a note of them, you will need to generate a new set. Your backup codes need to be kept safe, as this will be the only way that you will be able to get into your account if you lose access to your device.

In case you cannot access your device we have generated a set of backup codes that you can use. Each backup code on the list can only be used once. You can regenerate a new list of backup codes from Two-Factor Authentication Details on the Users page. Once a new set has been generated, any backup code in the old set is no longer valid. We suggest printing this list out and keeping it somewhere safe.

Backup Codes

- 5c9a4c84
- f20ea786
- 7f1aeb53
- a4f59f0c
- 21a32ced
- 1e3073b1
- 42e2e189
- f54f3fde
- 7424df5f
- 3dafab11

Copy to clipboard

زومر ةفاك مادختسا دعب. طقف ةدحاو ةرم يطايتحال اخصن زمر لك مادختسا نيكم: ةظحال ةديج داوكأ عاشنال ةحفصلال هذه لىل عوچرلا بجي، يطايتحال اخصنلا.

ةنمآلةةةاهنلةةطقنمدختسملةلد ةعجارم كنكمي،عجرملا نم ديزم ىلع لوصحلل

لماولةةةئانث ةقداصم ويديف نيكموتوتاباسحلا ةدهاشم كنكمي،كلذىلةةفاضإلاب

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا ذه Cisco ت مچرت
م ل ا ل ا ا ن ا ع مچ ي ف ن ي م دخت س م ل ل م عد ي و ت ح م م ي دقت ل ة ي ر ش ب ل و
ا م ك ة ق ي ق د ن و ك ت ن ل ة ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ا ل م ي ج ر ي . ة ص ا خ ل ا م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ا ل ا ة مچرت ل ا ع م ل ا ح ل ا و ه
ي ل ا م ا د ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا هذه ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل ج ن ا ل ا دن ت س م ل ا