

# Extension Mobility Cross Cluster (EMCC) ءاطخأ فاشكتسأ اهحالصإو

## تايوتحمل

[ةمدقملا](#)

[ةيساسألا تابلطتملا](#)

[تابلطتملا](#)

[ةمدختسمل تانوكملا](#)

[ةيساسأ تامولعم](#)

[ةكبش ل ل يطيطختلا مسرلا](#)

[نيوكتلا](#)

[اهحالصإو ءاطخألا فاشكتسا](#)

[اهعيجت بولطملا تانايبلا](#)

[لوخذلا ليجستل ليلحت للاثم](#)

[Cisco ربتخم نم زاهجلا تامولعم](#)

[CUCM ةعومجم قرايز لچس ةعجارم](#)

[CUCM ةيلزنملا ةعومجملا ماظن لچس ةعجارم](#)

[فتاهلا نيوكت فلم يف رهظت امك ةمدخللا](#)

[فتاهلل لچسلا ةعجارم](#)

[فتاهلل PCAP ةعجارم](#)

[ةلص تاذ تامولعم](#)

## ةمدقملا

Cisco Unified Extension Mobility Cross Cluster (EMCC) ةزيم دنتسمل اذه فصوي ةزيملا نيوكتو، ةزيملا نم ضرغل دنتسمل اذه يطغي (CUCM) Communications Manager. نم ديزمل ةلصل تاذ دراوملاو، تانايبلا ليلحت للاثمو، ةمهمل ةيصيخشنتلا تانايبلاو شحلا.

## ةيساسألا تابلطتملا

### تابلطتملا

ةيلاللا عيضاوملاب ةفرعم كيدل نوكت نأ Cisco ي صوت:

- فتاهلا ربع ليجستلا
- ةعسوتلل لقننتلا ةيناملا
- تاعومجملا ةددعتم تائيبلا

### ةمدختسمل تانوكملا


نمضتي زاهجو ةيجمررب دناسي ايلاح نأ امب ةغيص زاهجو ةيجمررب صاخ ىلا ةقيثو اذه ديقى ال ةمس اذه.

ةصاخ ةي لمعم ةئي ب ي ف ةدوجوملا ةزهجالا نم دنتسمل اذه ي ف ةدراول ا تامولعمل اءاشن ا مت تناك اذا .(يضا رتفا) حوسمم نيوكتب دنتسمل اذه ي ف ةمدختسمل ا ةزهجالا عيمج تادب رما يال لمحتحمل ريثاتلل كمهف نم دكاتف ،ليغشتلا دي ق ككتكبش

## ةيساسا تامولعمل

عمل ىرخا ىل ا ةومجم نم لقننلاب نيئيئاهنلا نيمدختسملل حامسلا وه ةزيملا هذه نم ضرغلا ،هفاتاه راضحا ىل ا مدختسمل ا جاتحي ال .لزانملا ةومجمب ةصاخلا لاصتالا تاداع ىل ع ظافحلا مادختساب دي عبالا عقوملا ي ف فاتاه ىل ا لوخدلا ليحستب ةطاسبب موقبي كلذ نم ال دب نكلو .هزاهج فيرعت فلم

## ةكبشلل يطيختلا مسرلا

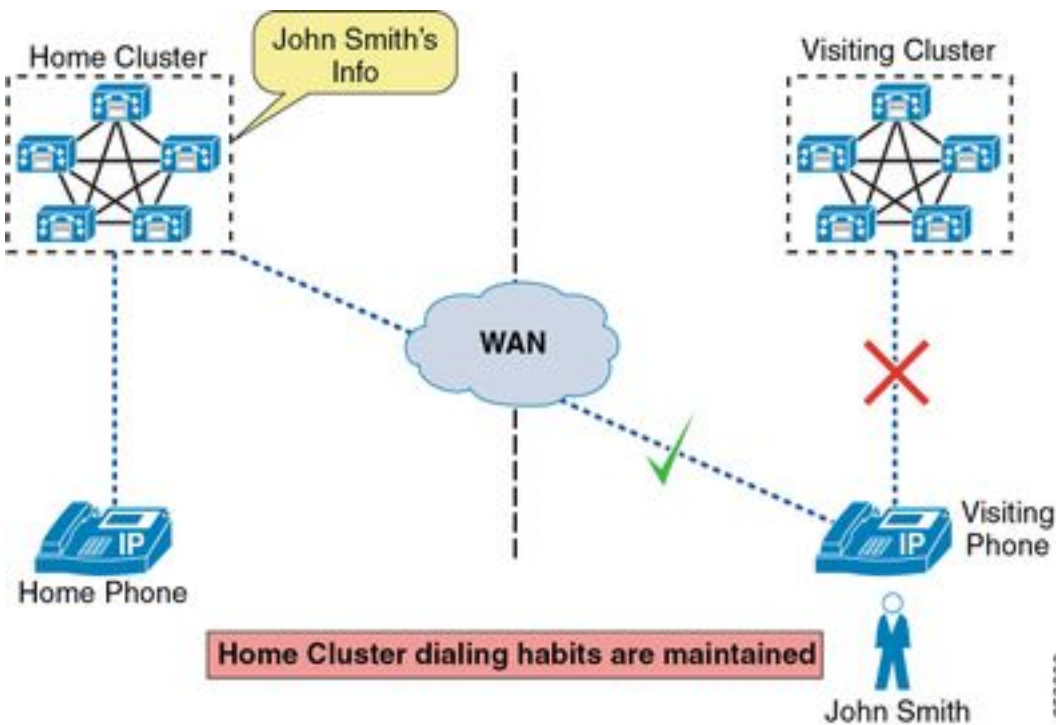

## نيوكتلا

ت EMCC نيوكت ةي طغت مت [Extension Mobility Cross UC مءاوخ نيكم](#) دنتسمل ا ي ف EMCC نيوكت ةي طغت مت [\(EMCC\)](#)

## اهحالصا ءاطخالا فاشكتسا

### اهعيمجت بولطملا تانايبلا

ةومجم لك نم تامولعمل ا هذه عيمجت كي لع بجي ،اهحالصا ءاطخالا فاشكتسا دنع CUCM:

- الك ىل ع CUCM رشانب ةصاخلا (CLI) رماوالا رطس ةهجاو نم طشنلا رادصلا راهظا .نيتمجمملا
- الك ي ف CUCM رشانب ةصاخلا رماوالا رطس ةهجاو نم ةكبشلا ىل ع ةومجمملا ماظن راهظا .نيتمجمملا

- نيتت وومجمل اتلك يف دقعل اعيمج نم لوخدلا ليجستب Cisco CallManager موقوي
- نيتت وومجمل اتلك يف دقعل اعيمج نم لوخدلا ليجستب Cisco Extension Mobility موقت
- اتلك يف دقعل اعيمج نم لوخدلا ليجستب Cisco Extension Mobility قيبت موقوي نيتت وومجمل
- نيتت وومجمل اتلك يف دقعل اعيمج نم لوخدلا ليجستب Cisco TFTP موقوي
- اتلك يف دقعل اعيمج نم لوخدلا ليجستب Cisco نم ققحتلا مدم موقت نيتت وومجمل
- نيتت وومجمل اتلك يف دقعل اعيمج نم قيبتت لل لجس - ثادحلل لضرع
- نيتت وومجمل اتلك يف دقعل لك نم ثادحلل لضرع ماظن لجس
- الك يف دقعل اعيمج نم مزحلل طاقتلل لجالجس لعل لوصحلل دي فملا نم نوكي دق
- لجالجس لل هذه تاهويرانيسلل مظعم بلطتل الل ،كلذ عمو ، نيتت وومجمل
- قلوام لوح ليصافت عجارم بجي ، جورخلل/لوخدلا ليجستب يف لشف ثودح قلا يف

لوخدلا ليجستب

مدختسمل فرعم

فتاهلل MAC ناونع

فتاهلل IP ناونع

ينمزلل عباطلل

EMCC مدمخل URL ناونع

- قلاشملا لوح ليصافت عجارم بجي ، لاصتالا يف لشف ثودح قلا يف

لاصتالا مقرر

هؤاعدتسلا مت يذلا مقررلا

ينمزلل عباطلل

إلا فتاهلل داعو ىرخألا عاضو لواعيرسلا لاغش نالا تارم ددع) مدختسمللا قبرت يه ام  
(...إلا ، قلا لاصتالا قلاشلا

فتاهلل نم قلا لاصتالا تانايبلا عم اضيأ بجي

- قلاش لعل ثادحلل لسلسلو ، قلاشلا لعل ددجم أطخ) مدختسملل لصح يذلا ام  
(...لكلذ لىلا امو ، فتاهلل
- مدختسمللا ليجستب مت شيح فتاهلل نم عيزوت قلا يف
- كلذ بلطتل الل تاهويرانيسلل مظعم نكل ، فتاهلل نم قلا لاصتالا نأ دي فملا نم نوكي دق

## لوخدلا ليجستب لىلحت لاثم

Cisco ربتخم نم زاوجل تامولعم

فتاهلل

زارطلا: 7821

تباطلل جم انربلل رادصلا: SIP78xx.12-1-1-12

IP ناونع: 192.168.7.104

eth.addr==c8:00:84:aa:87:43

ةي لزنم لة وومجم ل ماطن:

رادصإل: 11.5.1.15900-18  
ني وانع IP: 192.168.7.200

ةرئازة وومجم:

رادصإل: 11.5.1.15900-18  
ني وانع IP: 192.168.7.100 و 192.168.7.101 و 192.168.7.102 و 192.168.7.103

ناونع URL ل EMCC:

<http://192.168.7.100:8080/emapp/EMAppServlet?device=#DEVICENAME#&EMCC=#EMCC#>

م دختسم ل تام ول عم:

م دختسم ل فرعم: adgjm

ل و خ دل ليجست ت قو: 15:11

## CUCM ة وومجم ةرايز ل جسة جارم

EMAPP و EMSERVICE ني ب لئاسر ل ل جسة ل ل ل سلس ل س ل ل بي ت رت ل ره ظي: ةظ حالم  
ت اصاص ق ل ل هذه ن وارقت ام ني ب اذه نم اوسررت ح.

### emapp

```
##### 13:32:15,947 EMApp on the visiting cluster prints that it received a request pertaining
to EMCC for Device Name SEPC80084AA8743
2019-03-09 13:32:15,947 INFO [http-bio-80-exec-8 ] EMAppServlet - EMApp Request#
----->2
2019-03-09 13:32:15,948 INFO [http-bio-80-exec-8 ] EMAppServlet - EMAppServlet:
Request protocol is :http
```

```
##### 13:32:15,948 we can see the request isn't for logout, the device name, the ip address,
and that EMCC is set to true
2019-03-09 13:32:15,948 INFO [http-bio-80-exec-8 ] EMAppServlet - EMApp Request
parameters: Logout=null Device Name=SEPC80084AA8743 User Id=null Device Profile=null
Refresh=null Remote Host IP Address = 192.168.7.104 Via Header Set = false getClusterInfo = null
Lang = en_US Charset=utf-8,;q=0.8 Emcc = true
```

### emservice

```
##### 13:32:16,109 The device is being queried for a user
2019-03-09 13:32:16,109 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Querying
device user for device SEPC80084AA8743
2019-03-09 13:32:16,110 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Getting
device object - three params
2019-03-09 13:32:16,110 INFO [http-bio-443-exec-6 ] DBRequestor - 1:
DBRequestor.queryDeviceUser: Dev: 'SEPC80084AA8743' - Getting device object
```

```
##### 13:32:16,115 The result of the query is returned and we can see there isn't anyone logged
```

```

in at the moment: currentuserid=,
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] CMDatabase -
getDeviceInfo:Result of the query: {tkproduct=508, loginduration=, lastuserid=adgjm,
tkdeviceprotocol=11, pkid=b5a73ec1-a04d-5ad3-fa7f-e38c501800f7, tkmodel=621, logintime=,
currentuserid=, allowhotelingflag=t, fkdevicepool=1b1b9eb6-7803-11d3-bdf0-00108302ead1,
tkuserlocale=}
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] DBRequestor - 1:
DBRequestor.queryDeviceUser: Dev: 'SEPC80084AA8743' - Device object returned
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] DBRequestor - 1:
QueryDeviceUser: Device Logged out
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Device query
info contains userid=
2019-03-09 13:32:16,116 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Device query
info contains last login userid= adgjm
2019-03-09 13:32:16,116 INFO [http-bio-443-exec-6 ] EMServlet - 1:Query
Processing Time: 68

```

## emapp

```

##### 13:32:16,124 We can see the device doesn't have anyone logged in and that the profile is
not already in use elsewhere
2019-03-09 13:32:16,124 INFO [http-bio-80-exec-8 ] EMAppServlet - The login
status result for :SEPC80084AA8743:null:adgjm:null:no
2019-03-09 13:32:16,124 INFO [http-bio-80-exec-8 ] CMDatabase -
CMDatabase:checkDeviceAllowsAlternateScript
2019-03-09 13:32:16,126 INFO [http-bio-80-exec-8 ] CMDatabase - SEPC80084AA8743
with model 621 and locale 1 does not support alternate script
2019-03-09 13:32:16,126 INFO [http-bio-80-exec-8 ] EMAppServlet - Sent login page
for device SEPC80084AA8743
2019-03-09 13:32:16,126 INFO [http-bio-80-exec-8 ] EMAppServlet - Context:/emapp
::URI:/jsp/form1.jsp
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet -
findPreferredCharSet on utf-8,;q=0.8
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - token1 = utf-8
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - token2 = utf-8
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - charset with q
value is 1 utf-8
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - returning
charset as q value is 1 utf-8
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - my charset
=utf-8

```

```

##### 13:32:27,814 another request comes in via HTTP
2019-03-09 13:32:27,814 INFO [http-bio-80-exec-7 ] EMAppServlet - EMApp Request#
----->3
2019-03-09 13:32:27,815 INFO [http-bio-80-exec-7 ] EMAppServlet - EMAppServlet:
Request protocol is :http

```

```

##### 13:32:27,815 we can see the same info from before, but this time there is a user id
specified
2019-03-09 13:32:27,815 INFO [http-bio-80-exec-7 ] EMAppServlet - EMApp Request
parameters: Logout=null Device Name=SEPC80084AA8743 User Id=adgjm Device Profile=null
Refresh=null Remote Host IP Address = 192.168.7.104 Via Header Set = false getClusterInfo = null
Lang = en_US Charset=utf-8,;q=0.8 Emcc = true
2019-03-09 13:32:27,816 INFO [http-bio-80-exec-7 ] EMServlet - Posting to EM
Query Service:https://localhost:8443/emservice/EMServlet
2019-03-09 13:32:27,835 INFO [http-bio-80-exec-7 ] EMAppServlet - EMCC Request
for adgjm
2019-03-09 13:32:27,836 INFO [http-bio-80-exec-7 ] EMAppServlet - EMURI =
http%3A%2F%2F192.168.7.100%3A8080%2Femapp%2FEMAppServlet%3Fdevice%3DSEPC80084AA8743%26doLogout%3

```

Dtrue

2019-03-09 13:32:27,836 INFO [http-bio-80-exec-7 ] EMServiceCommunicator -  
postMsgToLoginService: Service URL :https://localhost:8443/emservice/EMServiceServlet

### emservice

##### 13:32:27,826 There is an authenticate request  
2019-03-09 13:32:27,826 INFO [http-bio-443-exec-10] EMServiceServlet - 2:  
authenticate2: Authenticate request.  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] Authenticator -  
2:Authenticator.authenticateTransaction: AppID: CCMSysUser- Checking values in credential cache  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] Authenticator -  
2:Authenticator.authenticateTransaction: AppID: CCMSysUser- Approved through credential cache,  
108234 ms remaining

##### 13:32:27,827 The authentication succeeds and there is a check for the user  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] EMServiceServlet - 2:EMService  
Authentication succeeded  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] EMServiceServlet - 2:EMService  
Check User Status  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] Authenticator -  
2:Authenticator.userExists: UserID: adgjm- Calling cmdb.isLocalUser(osUserID)...

##### 13:32:27,831 we see no user exists with id: adgjm  
2019-03-09 13:32:27,831 ERROR [http-bio-443-exec-10] CMDatabase -  
CMDatabase:isLocalUser: no user exists with id: adgjm  
2019-03-09 13:32:27,831 ERROR [http-bio-443-exec-10] CMDatabase -  
CMDatabase:isLocalUser: com.cisco.ccm.database.CMDBLException: Unknown user: adgjm  
2019-03-09 13:32:27,832 ERROR [http-bio-443-exec-10] Authenticator - Exception :  
Unknown user: adgjm  
2019-03-09 13:32:27,832 WARN [http-bio-443-exec-10] EMServiceServlet - 2: executeQuery  
MyException.  
2019-03-09 13:32:27,832 INFO [http-bio-443-exec-10] EMServiceServlet - 2:Query  
Processing Time: 11  
2019-03-09 13:32:27,839 INFO [http-bio-443-exec-2 ] EMServiceServlet - EMService  
Request# ----> : 3

##### 13:32:27,839 The request type is noted as EMCC  
2019-03-09 13:32:27,839 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:EMService:  
Request Type=EMCC  
2019-03-09 13:32:27,843 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
processEmccRequest: Received EMCC Login Request for :adgjm  
2019-03-09 13:32:27,843 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3: Executing  
authenticate2...  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
authenticate2: Authenticate request.  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] Authenticator -  
3:Authenticator.authenticateTransaction: AppID: CCMSysUser- Checking values in credential cache  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] Authenticator -  
3:Authenticator.authenticateTransaction: AppID: CCMSysUser- Approved through credential cache,  
108216 ms remaining  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:EMService  
Authentication succeeded  
2019-03-09 13:32:27,846 INFO [http-bio-443-exec-2 ] PolicyValidator -  
3:PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- Calling dbr.getDeviceObject  
2019-03-09 13:32:27,847 INFO [http-bio-443-exec-2 ] DBRequestor - 3:Getting  
device object - loginInfo, caller  
2019-03-09 13:32:27,847 INFO [http-bio-443-exec-2 ] DBRequestor - 3:  
PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- Getting device object

2019-03-09 13:32:27,850 INFO [http-bio-443-exec-2 ] CMDatabase -  
getDeviceInfo:Result of the query: {tkproduct=508, loginduration=, lastuserid=adgjm,  
tkdeviceprotocol=11, pkid=b5a73ec1-a04d-5ad3-fa7f-e38c501800f7, tkmodel=621, logintime=,  
currentuserid=, allowhotelingflag=t, fkdevicepool=1b1b9eb6-7803-11d3-bdf0-00108302ead1,  
tkuserlocale=}  
2019-03-09 13:32:27,851 INFO [http-bio-443-exec-2 ] DBRequestor - 3:  
PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- Device object returned  
2019-03-09 13:32:27,851 INFO [http-bio-443-exec-2 ] PolicyValidator -  
3:PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- dbr.getDeviceObject returned  
2019-03-09 13:32:27,851 INFO [http-bio-443-exec-2 ] EmccData - osQuery =  
SELECT COUNT(\*) as value FROM ProductSupportsFeature p INNER JOIN Device d on (p.tkProduct =  
d.tkProduct AND p.tkDeviceProtocol IN (99, d.tkDeviceProtocol )) INNER JOIN TypeSupportsFeature  
t ON p.tkSupportsFeature = t.Enum WHERE LOWER(d.name) = LOWER('SEPC80084AA8743') AND t.Moniker =  
'SUPPORTS\_FEATURE\_EMCC'  
2019-03-09 13:32:27,853 INFO [http-bio-443-exec-2 ] PolicyValidator -  
3:PolicyValidator.checkCurrentLogin: getCurrentLoginTime return value- 0

##### 13:32:27,854 No user is logged into the phone and we are going to look for the user's  
home cluster (only 1 cluster is listed in cluster view for this lab setup)

2019-03-09 13:32:27,854 INFO [http-bio-443-exec-2 ] PolicyValidator -  
3:PolicyValidator.checkCurrentLogin: no user currently logged in  
2019-03-09 13:32:27,854 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3  
findHomeCluster: Finding Home Cluster for User: adgjm

##### 13:32:27,928 The home cluster is determined to be 192.168.7.200 which is "ClusterTwo"  
with a pkid of b986ff55-4374-43d2-8d99-ad6db704e672

2019-03-09 13:32:27,928 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
EmccLoginRequest: Home Cluster URL for User:adgjm is :  
<https://192.168.7.200:8443/emservice/EMServiceServlet>  
2019-03-09 13:32:27,929 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
EmccLoginRequest: Device Profile for this user is: test\_emcc\_udp  
2019-03-09 13:32:27,969 INFO [http-bio-443-exec-2 ] EmccData - 3:  
getRemoteClusterInfo: Pkid for cluster ClusterTwo is b986ff55-4374-43d2-8d99-ad6db704e672

##### 13:32:27,970 The login request is sent to the home cluster

2019-03-09 13:32:27,970 INFO [http-bio-443-exec-2 ] EmccCommunicator - 3:  
performDoLogin : Sending home login XML to  
:<https://192.168.7.200:8443/emservice/EMServiceServlet> and Parsing the response  
2019-03-09 13:32:28,052 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
EmccLoginRequest: Performing Visiting Device Login for :adgjm  
2019-03-09 13:32:28,052 INFO [http-bio-443-exec-2 ] EMServiceServlet -  
3:performVisitingDeviceLogin - SEPC80084AA8743  
2019-03-09 13:32:28,072 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3: EmccRequest  
Processing Time: 233

## **emapp**

##### 13:32:28,075 The login is successful

2019-03-09 13:32:28,075 INFO [http-bio-80-exec-7 ] EMAppServlet - Successfully  
performed Login for user adgjm at SEPC80084AA8743  
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - Context:/emapp  
::URI:/jsp/phone\_refresh.jsp  
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet -  
findPreferredCharSet on utf-8,;q=0.8  
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - token1 = utf-8  
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - token2 = utf-8  
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - charset with q  
value is 1 utf-8  
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - returning

charset as q value is 1 utf-8

2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet  
=utf-8

- my charset

## CUCM ةلزنملا ةومجملا ماظن لجس ةعجارم

### emservice logs:

```
##### 13:32:27,863 EMService on the home cluster receives an EMCC Check User Request 2019-03-09
13:32:27,863 INFO [http-bio-443-exec-17] EMServiceServlet - EMService Request# ----> : 1 2019-
03-09 13:32:27,863 INFO [http-bio-443-exec-17] EMServiceServlet - 1:EMService: Request Type=EMCC
2019-03-09 13:32:27,872 INFO [http-bio-443-exec-17] EMServiceServlet - 1: Setting remoteIPAddr
to connection IP=192.168.7.100 2019-03-09 13:32:27,873 INFO [http-bio-443-exec-17]
EMServiceServlet - 1 : 3 : ClusterOne: processEmccRequest: Received Check User Request for
:adgjm ##### 13:32:27,873 The EMService on the home cluster checks if the user exists in the
local database 2019-03-09 13:32:27,873 INFO [http-bio-443-exec-17] EMServiceServlet - 1 : 3 :
ClusterOne: EmccCheckUser : Checking if User adgjm exists in local database 2019-03-09
13:32:27,873 INFO [http-bio-443-exec-17] Authenticator - 1:Authenticator.userExists: UserID:
adgjm- Calling cmdb.isLocalUser(osUserID)... ##### 13:32:27,889 EMService on the home cluster
finds the user then looks up the information for the remote cluster and responds with the user
id and associated device profiles 2019-03-09 13:32:27,889 INFO [http-bio-443-exec-17]
Authenticator - 1:Authenticator.userExists: UserID: adgjm- cmdb.isLocalUser(osUserID) returned
2019-03-09 13:32:27,889 INFO [http-bio-443-exec-17] DBRequestor - 1: queryUDP2: User Exists
2019-03-09 13:32:27,892 INFO [http-bio-443-exec-17] DBRequestor - UserInfo: UserID: adgjm
Password: Locale: 0 Authentication proxy rights: falseDevice Profiles: test_emcc_udp 2019-03-09
13:32:27,892 INFO [http-bio-443-exec-17] EMServiceServlet - 1: authenticate pin for adgjm 2019-
03-09 13:32:27,923 INFO [http-bio-443-exec-17] EmccData - 1: getRemoteClusterInfo: Pkid for
cluster ClusterOne is f672bb12-5e1b-4795-81fa-d06d5ce07e84 2019-03-09 13:32:27,925 INFO [http-
bio-443-exec-17] EMServiceServlet - 1 : 3 : ClusterOne: EmccCheckUser
<emccResponse><checkUser><user
id="adgjm"><numProfiles>1</numProfiles><exists/><deviceProfile1>test_emcc_udp</deviceProfile1></
user></checkUser></emccResponse> 2019-03-09 13:32:27,925 INFO [http-bio-443-exec-17]
EMServiceServlet - 1: EmccRequest Processing Time: 61 ##### 13:32:27,975 EMService on the home
cluster receives an EMCC Login Request 2019-03-09 13:32:27,975 INFO [http-bio-443-exec-19]
EMServiceServlet - EMService Request# ----> : 2 2019-03-09 13:32:27,975 INFO [http-bio-443-exec-
19] EMServiceServlet - 2:EMService: Request Type=EMCC 2019-03-09 13:32:27,978 INFO [http-bio-
443-exec-19] EMServiceServlet - 2: Setting remoteIPAddr to connection IP=192.168.7.100 2019-03-
09 13:32:27,978 INFO [http-bio-443-exec-19] EMServiceServlet - 2 : 3 : ClusterOne:
processEmccRequest: Received EMCC Home Cluster Login Request for :adgjm 2019-03-09 13:32:27,978
INFO [http-bio-443-exec-19] EMServiceServlet - 2 : 3 : DeviceSecurityMode: 1 HomeCluster
SecurityMode: 0 2019-03-09 13:32:27,978 INFO [http-bio-443-exec-19] EMServiceServlet - 2:
authenticate pin for adgjm 2019-03-09 13:32:27,980 INFO [http-bio-443-exec-19] EMServiceServlet
- 2 : 3 : ClusterOne: EmccHomeLogin : Performing Home Device Login for :adgjm 2019-03-09
13:32:27,981 INFO [http-bio-443-exec-19] EmccData - 2: getRemoteClusterInfo: Pkid for cluster
ClusterOne is f672bb12-5e1b-4795-81fa-d06d5ce07e84 2019-03-09 13:32:27,981 INFO [http-bio-443-
exec-19] EMServiceServlet - 2: computeLoginDuration: Device: SEPC80084AA8743 - Checking
autologout settings... 2019-03-09 13:32:28,048 INFO [http-bio-443-exec-19] EMServiceServlet - 2:
scheduleLogout: Device: SEPC80084AA8743-Setting autologout request with logout scheduler for :
36000 secs 2019-03-09 13:32:28,049 INFO [http-bio-443-exec-19] LogoutScheduler -
2:LogoutScheduler.setLogout(): Dev: SEPC80084AA8743- Set logout for 36000 seconds 2019-03-09
13:32:28,049 INFO [http-bio-443-exec-19] EMServiceServlet - 2: EmccRequest Processing Time: 74
##### 13:32:28,154 EMService on the home cluster then updates the extensionmobilitydynamic
database table 2019-03-09 13:32:28,154 INFO [Thread-35 ] CMDatabase - [CMDatabase]
process(<msg><type>DBL</type><table>extensionmobilitydynamic</table><tableid>170</tableid><actio
n>U</action><user>dbemweb</user><time>1552156348</time><old><cdrserver>2</cdrserver><cdrttime>155
0846224</cdrttime><pkid>180363d9-ed4b-4d5c-b299-
751aa3e06cfd</pkid><logintime>NULL</logintime><loginduration>NULL</loginduration><fkdevice_curre
ntloginprofile>NULL</fkdevice_currentloginprofile><fkenduser_lastlogin>97f2a05c-f973-6fd4-fd5e-
2048b7f70530</fkenduser_lastlogin><fkdevice>180363d9-ed4b-4d5c-b299-
751aa3e06cfd</fkdevice><allowcticontrolflag>t</allowcticontrolflag><ctiidbase>3</ctiidbase><date
timestamp>1550846224</datetimestamp><fkcallingsearchspace_restrict>NULL</fkcallingsearchspace_re
strict><fkenduser>NULL</fkenduser><fkmatrix_presence>NULL</fkmatrix_presence><fkmlppdomain>NULL<
```



```
/fkmlppdomain><fkphonetemplate>NULL</fkphonetemplate><fksoftkeytemplate>NULL</fksoftkeytemplate>
<ignorepi>f</ignorepi><lastnumplanindex>0</lastnumplanindex><mismatchedlogin>f</mismatchedlogin>
<tkpreemption>2</tkpreemption><tkstatus_mlppindicationstatus>2</tkstatus_mlppindicationstatus><t
kuserlocale>1</tkuserlocale><userholdmohaudiosourceid>NULL</userholdmohaudiosourceid><versionsta
mp>1550846224-ca3abf91-97c3-4ce7-9a3d-
4373eb132289</versionstamp><tkringsetting_dnd>NULL</tkringsetting_dnd><tkdndoption>2</tkdndoptio
n><tkstatus_joinacrosslines>0</tkstatus_joinacrosslines><tkbarga>0</tkbarga><tkstatus_alwaysusep
rimeline>2</tkstatus_alwaysuseprimeline><tkstatus_alwaysuseprimelineforvm>2</tkstatus_alwaysusep
rimelineforvm><fkcallingsearchspace_emcc>NULL</fkcallingsearchspace_emcc><fkfeaturecontrolpolicy
>NULL</fkfeaturecontrolpolicy><ifx_replcheck>6660833813205221397</ifx_replcheck></old><new><tkst
atus_alwaysuseprimelineforvm>2</tkstatus_alwaysuseprimelineforvm><tkstatus_alwaysuseprimeline>2<
/tkstatus_alwaysuseprimeline><ignorepi>f</ignorepi><tkringsetting_dnd>NULL</tkringsetting_dnd><f
kcallingsearchspace_restrict>NULL</fkcallingsearchspace_restrict><fkmlppdomain>NULL</fkmlppdomai
n><fkmatrix_presence>ad243d17-98b4-4118-8feb-
5ff2e1b781ac</fkmatrix_presence><fkphonetemplate>16f15a8c-63f6-44ba-b240-
82c24714ec12</fkphonetemplate><allowcticontrolflag>t</allowcticontrolflag><tkuserlocale>1</tkuse
rlocale><fksoftkeytemplate>NULL</fksoftkeytemplate><userholdmohaudiosourceid>NULL</userholdmohau
diosourceid><tkstatus_mlppindicationstatus>2</tkstatus_mlppindicationstatus><tkpreemption>2</tkp
reemption><tkdndoption>2</tkdndoption><ctiidbase>1</ctiidbase><mismatchedlogin>f</mismatchedlogi
n><lastnumplanindex>0</lastnumplanindex><fkenduser>97f2a05c-f973-6fd4-fd5e-
2048b7f70530</fkenduser><logintime>1552156348</logintime><loginduration>36000</loginduration><fk
device_currentloginprofile>91ac8680-48d3-48c1-956e-
f6e10d046ce4</fkdevice_currentloginprofile><datetimestamp>1552156347</datetimestamp><versionstam
p>1552156347-145cec2d-3b45-430f-acaf-d79657a15c58</versionstamp></new></msg> ) started 2019-03-
09 13:32:28,154 INFO [Thread-35 ] CMDatabase - [CMDatabase] process() -
table=extensionmobilitydynamic
```

#### CCM logs:

```
##### 13:32:28.155 The database on the home cluster receives the update and processes it
00009522.001 |13:32:28.155 |AppInfo |ProcessCnf N: extensionmobilitydynamic U 180363d9-ed4b-
4d5c-b299-751aa3e06cfd, size(2864) fkmatrix_presence(NULL/ad243d17-98b4-4118-8feb-5ff2e1b781ac)
fkphonetemplate(NULL/16f15a8c-63f6-44ba-b240-82c24714ec12) ctiidbase(3/1)
fkenduser(NULL/97f2a05c-f973-6fd4-fd5e-2048b7f70530) logintime(NULL/1552156348)
loginduration(NULL/36000) fkdevice_currentloginprofile(NULL/91ac8680-48d3-48c1-956e-
f6e10d046ce4) datetimestamp(1550846224/1552156347) versionstamp(1550846224-ca3abf91-97c3-4ce7-
9a3d-4373eb132289/1552156347-145cec2d-3b45-430f-acaf-d79657a15c58)
```

### فتاهل نيوكت فلم ي ف رهظت امك ةمدخل

```
<phoneService type="0" category="0">
<name>EMCC_Service</name>
<url>http://192.168.7.100:8080/emapp/EMAppServlet?device=#DEVICENAME#&EMCC=#EMCC#</url>
<vendor></vendor>
<version></version>
</phoneService>
```

### فتاهل لجلسلا ةعجارم

تالجلسلا هذه عي مجت دن ع اطاخ احي حصت اي نيك مت متي مل :ةظحال

```
##### 18:32:35.240378 || The EMCC mode is changed to true
4743 WRN Mar 09 18:32:35.240378 (618:910) JAVA-configmgr MQThread|DisplayTask:? - EMCC mode
changed to true
4744 WRN Mar 09 18:32:35.241080 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise is disabled
4745 WRN Mar 09 18:32:35.241873 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise null domain
4746 WRN Mar 09 18:32:35.242606 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise null secret
```

4747 WRN Mar 09 18:32:35.243643 (618:910) JAVA-configmgr MQThread|DisplayTask:? -  
resetCurrentPowerState(): Energywise disabled for EMCC mode  
4748 ERR Mar 09 18:32:35.244254 (618:910) JAVA-IO\_JNI| NIOLightLamp: led Data passed to  
cprLedSet(): 0x01000000  
4749 ERR Mar 09 18:32:35.244712 (618:910) JAVA-[API]LED ID error  
4750 ERR Mar 09 18:32:35.245170 (618:910) JAVA-IO\_JNI| !!! cprLedSet() return failed!  
4751 WRN Mar 09 18:32:35.245933 (618:910) JAVA-configmgr MQThread|DisplayTask:? -  
resetCurrentPowerState(): energywise is not available now

##### 18:32:35.273065 || sipcc is notified that EMCC is enabled  
4752 NOT Mar 09 18:32:35.273065 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -  
[commitEMCCProperties] to notify sipcc of EMCC:enabled  
4753 NOT Mar 09 18:32:35.275751 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -  
[commitEMCCProperties] notify sipcc of [vEM-IP,vEM-Port]:[192.168.7.100,8080]

##### 18:32:35.313016 || We identify the TFTP servers for the home cluster  
4754 NOT Mar 09 18:32:35.313016 (339:1813) downd-SETTFTP [339] emcc\_mode =1, override =0,  
tempTftp1= 192.168.7.200, tempTftp2 = , tempTftp3 = , tempTftp4 =

##### 18:32:36.726445 || The EMCC mini config files is received  
4797 WRN Mar 09 18:32:36.726445 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -  
EMCC|Received Mini-config file.  
4798 WRN Mar 09 18:32:36.727636 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -  
====>no need set capf,EMCC=true and encrConfig=false  
4799 INF Mar 09 18:32:36.728643 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -  
processConfigNoError: result=1  
4800 NOT Mar 09 18:32:36.731786 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -  
Sending update notice to Metmand  
4801 NOT Mar 09 18:32:36.732794 (624:624) metmand-config\_parser\_main parsing  
/usr/local/flash0/sip-SEPC80084AA8743.cnf.xml  
4802 NOT Mar 09 18:32:36.741400 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -  
Sending update notice to Metmand - COMPLETE  
4803 NOT Mar 09 18:32:36.748115 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -  
Config processConfigNoError() result code=CONFIG\_FILE\_CHANGED

##### 18:32:37.594689 || The phone requests the CTL file from the Home Cluster  
4849 NOT Mar 09 18:32:37.594689 (339:1850) downd-GETXXTP  
[GT339][src=CTLSEPC80084AA8743.tlv][dest=/tmp/CTLFile.tlv][serv=][serv6=][sec=0]  
4850 NOT Mar 09 18:32:37.597405 (339:1850) downd-In normal mode, call -> makeXXTPrequest  
(V6...)  
4851 NOT Mar 09 18:32:37.643125 (618:755) JAVA-Thread-12|cip.setg.IpStacksStateProperty:? -  
IpStacksStateProperty changed from "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6  
STACK TURNED OFF)" to "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6 STACK TURNED  
OFF)"  
4852 NOT Mar 09 18:32:37.641843 (339:1850) downd-EMCC reading:  
4853 NOT Mar 09 18:32:37.643735 (339:1850) downd- EMCC Mode - 1  
4854 NOT Mar 09 18:32:37.643827 (339:1850) downd- EMCC Override - 0  
4855 NOT Mar 09 18:32:37.643888 (339:1850) downd- Home Tftp 1 - [14] 192.168.7.200  
4856 NOT Mar 09 18:32:37.643949 (339:1850) downd- Home Tftp 2 - [1]  
4857 NOT Mar 09 18:32:37.644010 (339:1850) downd- Home Tftp 3 - [1]  
4858 NOT Mar 09 18:32:37.644071 (339:1850) downd- Home Tftp 4 - [1]  
4859 NOT Mar 09 18:32:37.644132 (339:1850) downd-unable to convert the tempTftpSvr2: retVal=0  
4860 NOT Mar 09 18:32:37.644193 (339:1850) downd-unable to convert the tempTftpSvr4: retVal=0

```
##### 18:32:37.644345 || look up server - 0 - 192.168.7.200
4861 NOT Mar 09 18:32:37.644345 (339:1850) downd-AUTH.SRVR [GT339] look up server - 0 -
192.168.7.200
4862 NOT Mar 09 18:32:37.646787 (618:755) JAVA-Calling handleNetSDEvent
4863 NOT Mar 09 18:32:37.699343 (339:1850) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0
4864 NOT Mar 09 18:32:37.750465 (339:1850) downd-AUTH.SRVR [GT339] authentication retval = 9
4865 NOT Mar 09 18:32:37.750648 (339:1850) downd-XXTP Non secure file requested
4866 NOT Mar 09 18:32:37.750923 (339:1850) downd-XXTP start request, server 1 - 192.168.7.200
4867 NOT Mar 09 18:32:37.751441 (339:1850) downd-XXTP actualserver [192.168.7.200]
4868 NOT Mar 09 18:32:37.763222 (339:1858) downd-XXX arg[0] /usr/sbin/gethttp
4869 NOT Mar 09 18:32:37.768655 (339:1858) downd-XXX arg[1] -t
4870 NOT Mar 09 18:32:37.769296 (339:1858) downd-XXX arg[2] 192.168.7.200
4871 NOT Mar 09 18:32:37.769784 (339:1858) downd-XXX arg[3] -i0
4872 NOT Mar 09 18:32:37.774088 (339:1858) downd-XXX arg[4] CTLSEPC80084AA8743.tlv
4873 NOT Mar 09 18:32:37.774606 (339:1858) downd-XXX arg[5] /tmp/CTLFile.tlv
4874 NOT Mar 09 18:32:37.775095 (339:1858) downd-XXX arg[6] (null)
4875 NOT Mar 09 18:32:37.818739 (1858:1858) GHTTP-LIMIT download will be limited to 2048 KB
4876 DEB Mar 09 18:32:37.974088 (618:755) JAVA-getassetid(): pid: 618
4877 DEB Mar 09 18:32:37.974454 (618:755) JAVA-getassetid(): msgsnd() rc: 0, size: 44 bytes
4878 DEB Mar 09 18:32:37.975980 (618:755) JAVA-getassetid(): msgrcv() 44 bytes
4879 NOT Mar 09 18:32:37.978177 (322:366) NETSD-siginfThrds(): tempvvlan: 4095 vvlan: 4095
linkState: 1 cdpState: 1
4880 NOT Mar 09 18:32:37.979032 (322:366) NETSD-siginfThrds(): activechange: 0
4881 NOT Mar 09 18:32:37.979123 (322:366) NETSD-siginfThrds(): force_dhcp: 0
```

```
##### 18:32:37.985319 || The home cluster sends a 503 Service Unavailable
4882 ERR Mar 09 18:32:37.985319 (1858:1858) GHTTP-http get [HTTP/1.1 503 Service Unavailab]
4883 NOT Mar 09 18:32:38.001617 (339:1862) downd-XXX arg[0] /usr/sbin/tftpd
4884 NOT Mar 09 18:32:38.011475 (339:1862) downd-XXX arg[1] -t
4885 NOT Mar 09 18:32:38.011994 (339:1862) downd-XXX arg[2] 192.168.7.200
4886 NOT Mar 09 18:32:38.015595 (339:1862) downd-XXX arg[3] -i0
4887 NOT Mar 09 18:32:38.016023 (339:1862) downd-XXX arg[4] CTLSEPC80084AA8743.tlv
4888 NOT Mar 09 18:32:38.016541 (339:1862) downd-XXX arg[5] /tmp/CTLFile.tlv
4889 NOT Mar 09 18:32:38.016999 (339:1862) downd-XXX arg[6] (null)
4890 NOT Mar 09 18:32:38.082496 (618:755) JAVA-Thread-12|cip.setg.IpStacksStateProperty:? -
IpStacksStateProperty changed from "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6
STACK TURNED OFF)" to "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6 STACK TURNED
OFF)"
4891 NOT Mar 09 18:32:38.153608 (1862:1862) TFTPDP-pid = 1862
```

```
##### 18:32:38.244254 || The phone requests the CTL file from the Home Cluster via port 69
instead of using http and port 6970
4892 NOT Mar 09 18:32:38.244254 (1862:1862) TFTPDP-LIMIT download will be limited to 2048 KB
4893 ERR Mar 09 18:32:38.245933 (1862:1862) TFTPDP-ai_family = 2, sockType = 2, protocol = 17
4894 NOT Mar 09 18:32:38.246634 (1862:1862) TFTPDP-Requesting CTLSEPC80084AA8743.tlv from
192.168.7.200
4895 WRN Mar 09 18:32:38.247306 (1862:1862) TFTPDP-sendto() failed : Address family not supported
by protocol
4896 NOT Mar 09 18:32:38.752784 (1862:1862) TFTPDP-Timeout: retransmit the last packet (1)
```

```
##### 18:32:38.754493 || The phone is told "File not found" since the cluster isn't in mixed
mode
4897 WRN Mar 09 18:32:38.754493 (1862:1862) TFTPDP-Error: (1+1)File not found
4898 NOT Mar 09 18:32:38.756996 (339:1850) downd-XXTP complete - status = 2
```

```
##### 18:32:38.767556 || The phone requests the ITL file from the Home Cluster
```

4899 NOT Mar 09 18:32:38.767556 (339:1882) downd-GETXXTP  
[GT339][src=ITLSEPC80084AA8743.tlv][dest=/tmp/ITLFile.tlv][serv=][serv6=][sec=0]  
4900 NOT Mar 09 18:32:38.769540 (339:1882) downd-In normal mode, call - > makeXXTPrequest  
(V6...)  
4901 NOT Mar 09 18:32:38.770944 (339:1882) downd-EMCC reading:  
4902 NOT Mar 09 18:32:38.772256 (339:1882) downd- EMCC Mode - 1  
4903 NOT Mar 09 18:32:38.774545 (339:1882) downd- EMCC Override - 0  
4904 NOT Mar 09 18:32:38.775003 (339:1882) downd- Home Tftp 1 - [14] 192.168.7.200  
4905 NOT Mar 09 18:32:38.775430 (339:1882) downd- Home Tftp 2 - [1]  
4906 NOT Mar 09 18:32:38.775888 (339:1882) downd- Home Tftp 3 - [1]  
4907 NOT Mar 09 18:32:38.776651 (339:1882) downd- Home Tftp 4 - [1]  
4908 NOT Mar 09 18:32:38.777170 (339:1882) downd-unable to convert the tempTftpSvr2: retVal=0  
4909 NOT Mar 09 18:32:38.777628 (339:1882) downd-unable to convert the tempTftpSvr4: retVal=0  
4910 NOT Mar 09 18:32:38.778177 (339:1882) downd-AUTH.SRVR [GT339] look up server - 0 -  
192.168.7.200  
4911 NOT Mar 09 18:32:38.805035 (339:1850) downd-DDGETTFTP.RESULT [\_2\_ File not found  
]  
4912 NOT Mar 09 18:32:38.832565 (339:1882) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0  
4913 NOT Mar 09 18:32:38.883534 (339:1882) downd-AUTH.SRVR [GT339] authentication retval = 9  
4914 NOT Mar 09 18:32:38.883717 (339:1882) downd-XXTP Non secure file requested  
4915 NOT Mar 09 18:32:38.884724 (339:1882) downd-XXTP start request, server 1 - 192.168.7.200  
4916 NOT Mar 09 18:32:38.885334 (339:1882) downd-XXTP actualserver [192.168.7.200]  
4917 NOT Mar 09 18:32:38.888997 (339:1886) downd-XXX arg[0] /usr/sbin/gethttp  
4918 NOT Mar 09 18:32:38.889638 (339:1886) downd-XXX arg[1] -t  
4919 NOT Mar 09 18:32:38.890126 (339:1886) downd-XXX arg[2] 192.168.7.200  
4920 NOT Mar 09 18:32:38.890584 (339:1886) downd-XXX arg[3] -i0  
4921 NOT Mar 09 18:32:38.891103 (339:1886) downd-XXX arg[4] ITLSEPC80084AA8743.tlv  
4922 NOT Mar 09 18:32:38.891652 (339:1886) downd-XXX arg[5] /tmp/ITLFile.tlv  
4923 NOT Mar 09 18:32:38.892171 (339:1886) downd-XXX arg[6] (null)  
4924 NOT Mar 09 18:32:38.932397 (1886:1886) GHTTP-LIMIT download will be limited to 2048 KB

##### 18:32:38.937860 || The ITL file is received

4925 NOT Mar 09 18:32:38.937860 (1886:1886) GHTTP-hdr->HTTP/1.1 200 OK  
4926 NOT Mar 09 18:32:38.938928 (1886:1886) GHTTP-hdr->Content-length: 7879  
4927 NOT Mar 09 18:32:38.939355 (1886:1886) GHTTP-hdr->Cache-Control: no-store  
4928 NOT Mar 09 18:32:38.939813 (1886:1886) GHTTP-hdr->Content-type: \*/\*  
4929 NOT Mar 09 18:32:38.943628 (339:1882) downd-XXTP complete - status = 100  
4930 NOT Mar 09 18:32:38.952052 (346:1887) SECUREAPP-AUTH: start of pad ('T' 0x0d) at TLV 15  
4931 WRN Mar 09 18:32:38.957881 (346:1887) SECUREAPP-AUTH: hdr ver 1.2 (knows only upto 1.1)  
4932 NOT Mar 09 18:32:38.958370 (346:1887) SECUREAPP-AUTH: skipping 1 trail bytes (pad and/or  
unknown TLVs)  
4933 NOT Mar 09 18:32:38.987455 (339:1882) downd-DDGETTFTP.RESULT [\_100\_ HTTP NO ERROR  
]  
4934 NOT Mar 09 18:32:39.928521 (413:426) CDP-cdpRcvPkt(): deviceId is HQSW

##### 18:32:40.161238 || The phone reaches out to the TVS server on the Visiting Cluster

4935 NOT Mar 09 18:32:40.161238 (346:1810) SECUREAPP-Sec SSL Connection - Handshake successful.  
4936 NOT Mar 09 18:32:40.164291 (346:1810) SECUREAPP-TVS process request - Successfully sent the  
TVS request to TVS server, bytes written : 180  
4937 NOT Mar 09 18:32:40.183701 (346:1810) SECUREAPP-Close and free connection handler at  
0x2b2d2ac0  
4938 NOT Mar 09 18:32:40.184220 (346:1810) SECUREAPP-Sec SSL Close Connection successful.

##### 18:32:40.672180 || The authentication is successful

4939 NOT Mar 09 18:32:40.672180 (346:1887) SECUREAPP-Hashes match... authentication successful.  
4940 NOT Mar 09 18:32:40.676270 (346:1887) SECUREAPP-AUTH: start of pad ('T' 0x0d) at TLV 15  
4941 WRN Mar 09 18:32:40.677002 (346:1887) SECUREAPP-AUTH: hdr ver 1.2 (knows only upto 1.1)  
4942 NOT Mar 09 18:32:40.677491 (346:1887) SECUREAPP-AUTH: skipping 1 trail bytes (pad and/or

unknown TLVs)

```
##### 18:32:40.678040 || The trust list is updated
4943 NOT Mar 09 18:32:40.678040 (346:1887) SECUREAPP-updateFromFile: TL parse to table:
CTL_SUCCESS
4944 NOT Mar 09 18:32:40.678559 (346:1887) SECUREAPP-updateFromFile: Updating master TL table
4945 INF Mar 09 18:32:40.703372 (618:1845) JAVA-TL update Thread|cip.sec.ISecurityListener:-----
----updateCtl,result=8 - -----invoke proxy
4946 INF Mar 09 18:32:40.704715 (618:910) JAVA-configmgr MQThread|cip.sec.ISecurityListener:----
----updateCtl,result=8 - -----invoke dispatcher
4947 NOT Mar 09 18:32:40.705142 (618:910) JAVA-configmgr
MQThread|cip.cfg.ConfigManager$MySecurityListener:? - ConfigManager updateCTL() rc=8
retryCount=0, failReason:Success
4948 NOT Mar 09 18:32:40.721104 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: - [SipConfig]
endDownloadCTL-time:1552156360720
4949 NOT Mar 09 18:32:41.187578 (618:910) JAVA-CCAPIDevicesendAlarm: phone-app requesting alarm
to be sent
4950 DEB Mar 09 18:32:41.188463 (618:910) JAVA-SIPCC-SIP_ALARM: storeAlarm: stored alarm at
index [1].
4951 DEB Mar 09 18:32:41.189012 (618:910) JAVA-[getDeployMode] deploy-mode:1
4952 NOT Mar 09 18:32:41.195574 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: - [SipConfig]
beginDownloadConfig-time:1552156361195
4953 NOT Mar 09 18:32:41.196276 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -
[clearTftpTimeout] to reset tftp-timeout error
```

```
##### 18:32:41.198046 || The phone requests the CNF file from the Home Cluster
4954 NOT Mar 09 18:32:41.198046 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -
Requesting CONFIG file: ram/SEPC80084AA8743.cnf.xml.59075 from TFTP Service(1), encrypt =
false,isApplyingConfigFromFlash:false
4955 INF Mar 09 18:32:41.198748 (618:910) JAVA-[[MESSAGE_1.0]]: [CONFIG-MGR] -->
tftpRequest(ram/SEPC80084AA8743.cnf.xml.59075) --> [TFTP] :
4956 NOT Mar 09 18:32:41.202288 (339:1899) downd-GETXXTP
[GT339][src=SEPC80084AA8743.cnf.xml][dest=/tmp/ram/SEPC80084AA8743.cnf.xml.59075][serv=][serv6=]
[sec=2]
4957 NOT Mar 09 18:32:41.203051 (339:1899) downd-In normal mode, call - > makeXXTPrequest
(V6...)
4958 NOT Mar 09 18:32:41.204364 (339:1899) downd-EMCC reading:
4959 NOT Mar 09 18:32:41.204852 (339:1899) downd- EMCC Mode - 1
4960 NOT Mar 09 18:32:41.205310 (339:1899) downd- EMCC Override - 0
4961 NOT Mar 09 18:32:41.205768 (339:1899) downd- Home Tftp 1 - [14] 192.168.7.200
4962 NOT Mar 09 18:32:41.206531 (339:1899) downd- Home Tftp 2 - [1]
4963 NOT Mar 09 18:32:41.206989 (339:1899) downd- Home Tftp 3 - [1]
4964 NOT Mar 09 18:32:41.207416 (339:1899) downd- Home Tftp 4 - [1]
4965 NOT Mar 09 18:32:41.208057 (339:1899) downd-unable to convert the tempTftpSvr2: retVal=0
4966 NOT Mar 09 18:32:41.208515 (339:1899) downd-unable to convert the tempTftpSvr4: retVal=0
4967 NOT Mar 09 18:32:41.209064 (339:1899) downd-AUTH.SRVR [GT339] look up server - 0 -
192.168.7.200
4968 NOT Mar 09 18:32:41.261010 (339:1899) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0
4969 NOT Mar 09 18:32:41.312070 (339:1899) downd-AUTH.SRVR [GT339] authentication retval = 9
4970 NOT Mar 09 18:32:41.312284 (339:1899) downd-XXTP Secure file requested
4971 NOT Mar 09 18:32:41.312406 (339:1899) downd-XXTP authenticated file approved - add .sgn if
necessary -- SEPC80084AA8743.cnf.xml.sgn
4972 NOT Mar 09 18:32:41.312650 (339:1899) downd-XXTP start request, server 1 - 192.168.7.200
4973 NOT Mar 09 18:32:41.313169 (339:1899) downd-XXTP actualserver [192.168.7.200]
4974 NOT Mar 09 18:32:41.317533 (339:1902) downd-XXX arg[0] /usr/sbin/gethttp
4975 NOT Mar 09 18:32:41.318266 (339:1902) downd-XXX arg[1] -t
4976 NOT Mar 09 18:32:41.318693 (339:1902) downd-XXX arg[2] 192.168.7.200
4977 NOT Mar 09 18:32:41.319151 (339:1902) downd-XXX arg[3] -i0
4978 NOT Mar 09 18:32:41.319578 (339:1902) downd-XXX arg[4] SEPC80084AA8743.cnf.xml.sgn
4979 NOT Mar 09 18:32:41.320097 (339:1902) downd-XXX arg[5]
```

/tmp/ram/SEPC80084AA8743.cnf.xml.59075

4980 NOT Mar 09 18:32:41.320738 (339:1902) downd-XXX arg[6] (null)

4981 NOT Mar 09 18:32:41.360140 (1902:1902) GHTTP-LIMIT download will be limited to 2048 KB

##### 18:32:41.378666 || The CNF file is received

4982 NOT Mar 09 18:32:41.378666 (1902:1902) GHTTP-hdr->HTTP/1.1 200 OK

4983 NOT Mar 09 18:32:41.378940 (1902:1902) GHTTP-hdr->Content-length: 12277

4984 NOT Mar 09 18:32:41.379062 (1902:1902) GHTTP-hdr->Cache-Control: no-store

4985 NOT Mar 09 18:32:41.379154 (1902:1902) GHTTP-hdr->Content-type: \*/\*

4986 NOT Mar 09 18:32:41.384281 (339:1899) downd-XXTP complete - status = 100

##### 18:32:43.821608 || The phone requests the SK file from the Home Cluster

5105 NOT Mar 09 18:32:43.821608 (339:1929) downd-GETXXTP [GT339][src=SKb0ec918f-b9ee-994b-57ae-345883c1fde8.xml][dest=/tmp/cache/SK-2103396823][serv=][serv6=][sec=2]

5106 NOT Mar 09 18:32:43.823500 (339:1929) downd-In normal mode, call - > makeXXTPrequest (V6...)

5107 NOT Mar 09 18:32:43.825850 (339:1929) downd-EMCC reading:

5108 NOT Mar 09 18:32:43.826399 (339:1929) downd- EMCC Mode - 1

5109 NOT Mar 09 18:32:43.828170 (339:1929) downd- EMCC Override - 0

5110 NOT Mar 09 18:32:43.828689 (339:1929) downd- Home Tftp 1 - [14] 192.168.7.200

5111 NOT Mar 09 18:32:43.830215 (339:1929) downd- Home Tftp 2 - [1]

5112 NOT Mar 09 18:32:43.830642 (339:1929) downd- Home Tftp 3 - [1]

5113 NOT Mar 09 18:32:43.831191 (339:1929) downd- Home Tftp 4 - [1]

5114 NOT Mar 09 18:32:43.832381 (339:1929) downd-unable to convert the tempTftpSvr2: retVal=0

5115 NOT Mar 09 18:32:43.832931 (339:1929) downd-unable to convert the tempTftpSvr4: retVal=0

5116 NOT Mar 09 18:32:43.834396 (339:1929) downd-AUTH.SRVR [GT339] look up server - 0 - 192.168.7.200

5117 NOT Mar 09 18:32:43.888722 (339:1929) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0

5118 NOT Mar 09 18:32:43.940485 (339:1929) downd-AUTH.SRVR [GT339] authentication retval = 9

5119 NOT Mar 09 18:32:43.941065 (339:1929) downd-XXTP Secure file requested

5120 NOT Mar 09 18:32:43.941248 (339:1929) downd-XXTP authenticated file approved - add .sgn if necessary -- SKb0ec918f-b9ee-994b-57ae-345883c1fde8.xml.sgn

5121 NOT Mar 09 18:32:43.941522 (339:1929) downd-XXTP start request, server 1 - 192.168.7.200

5122 NOT Mar 09 18:32:43.942926 (339:1929) downd-XXTP actualserver [192.168.7.200]

5123 NOT Mar 09 18:32:43.952510 (339:1932) downd-XXX arg[0] /usr/sbin/gethttp

5124 NOT Mar 09 18:32:43.953334 (339:1932) downd-XXX arg[1] -t

5125 NOT Mar 09 18:32:43.955318 (339:1932) downd-XXX arg[2] 192.168.7.200

5126 NOT Mar 09 18:32:43.956325 (339:1932) downd-XXX arg[3] -i0

5127 NOT Mar 09 18:32:43.956783 (339:1932) downd-XXX arg[4] SKb0ec918f-b9ee-994b-57ae-345883c1fde8.xml.sgn

5128 NOT Mar 09 18:32:43.957423 (339:1932) downd-XXX arg[5] /tmp/cache/SK-2103396823

5129 NOT Mar 09 18:32:43.958797 (339:1932) downd-XXX arg[6] (null)

5130 NOT Mar 09 18:32:44.063756 (1932:1932) GHTTP-LIMIT download will be limited to 2048 KB

##### 18:32:44.077399 || The SK template file is received

5131 NOT Mar 09 18:32:44.077399 (1932:1932) GHTTP-hdr->HTTP/1.1 200 OK

5132 NOT Mar 09 18:32:44.077948 (1932:1932) GHTTP-hdr->Content-length: 4137

5133 NOT Mar 09 18:32:44.078467 (1932:1932) GHTTP-hdr->Cache-Control: no-store

5134 NOT Mar 09 18:32:44.079078 (1932:1932) GHTTP-hdr->Content-type: \*/\*

5135 NOT Mar 09 18:32:44.085456 (339:1929) downd-XXTP complete - status = 100

##### 18:32:44.55309 || The list of CCM servers is printed (there is only 1 in the Home Cluster).

5319 DEB Mar 09 18:32:44.553090 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportCfgTableInit: For PRIMARY\_CCM: IPv4 Addr: 192.168.7.200 Port: 5060 listen Port: 5060 IPv6 Addr: Port: 5060 listen Port: 5060 transport: 4 Sec Level: 0 IP type: 1

5320 NOT Mar 09 18:32:44.554432 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=SECONDARY\_CCM=2.  
5321 DEB Mar 09 18:32:44.554646 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportCfgTableInit: For SECONDARY\_CCM: IPv4 Addr: Port: 0 listen Port: 0 IPv6 Addr: Port: 0 listen Port: 0 transport: 4 Sec Level: 0 IP type: 0  
5322 NOT Mar 09 18:32:44.555501 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=TERTIARY\_CCM=3.  
5323 DEB Mar 09 18:32:44.555653 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportCfgTableInit: For TERTIARY\_CCM: IPv4 Addr: Port: 0 listen Port: 0 IPv6 Addr: Port: 0 listen Port: 0 transport: 4 Sec Level: 0 IP type: 0  
5324 NOT Mar 09 18:32:44.556416 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=SRST\_CCM=4.

##### 18:32:44.559102 || The phone opens a TCP connection with the CCM on the Home Cluster  
5333 DEB Mar 09 18:32:44.559102 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_tcp\_create\_connection: socket connection in progress cpr\_errno = 120 errno = 115 ipaddr: 192.168.7.200, port: 5060  
5334 DEB Mar 09 18:32:44.559682 (618:927) JAVA-SIPCC-SIP\_SOCKET: sip\_tcp\_create\_connection: socket:46, set tos/dscp: local address type:1,tos\_dscp\_val:96  
5335 DEB Mar 09 18:32:44.559835 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn: <PRIMARY\_CCM>: CC TCP socket opened: to <192.168.7.200>:<5060>, local\_port: 51778 handle=<46>  
5336 DEB Mar 09 18:32:44.560323 (618:927) JAVA-SIPCC-SIP\_ALARM: update\_unregister\_alarm\_info: Info\_type=CC\_UNREG\_ALARM\_PORT\_INFO ccm\_id=PRIMARY\_CCM phone\_tcp\_port=51778 sip\_info\_msg=  
5337 NOT Mar 09 18:32:44.560506 (618:927) JAVA-set\_active\_ccm: ccm=PRIMARY\_CCM port=51778  
5338 NOT Mar 09 18:32:44.560872 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=SECONDARY\_CCM=2.  
5339 NOT Mar 09 18:32:44.561025 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn: <SECONDARY\_CCM>: CC address/port not configured2.  
5340 NOT Mar 09 18:32:44.561544 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=TERTIARY\_CCM=3.  
5341 NOT Mar 09 18:32:44.561818 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn: <TERTIARY\_CCM>: CC address/port not configured2.  
5342 NOT Mar 09 18:32:44.562703 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=SRST\_CCM=4.  
5343 NOT Mar 09 18:32:44.562887 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn: <SRST\_CCM>: CC address/port not configured2.  
5344 NOT Mar 09 18:32:44.563711 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_regmgr\_setup\_cc\_conns: NO VALID STANDBY CALL CONTROL AVAILABLE!

##### 18:32:45.402533 || ALL LINES UN-REGISTERED --- this is because the phone is unregistering from the visiting cluster  
5818 NOT Mar 09 18:32:45.402533 (618:927) JAVA-SIPCC-UI\_API: ui\_update\_registration\_state\_all\_lines: \*\*\*\*\*ALL LINES UN-REGISTERED\*\*\*\*\*  
5819 DEB Mar 09 18:32:45.402838 (618:926) JAVA-SIPCC-SIP\_REG\_STATE: ccappFeatureUpdated: Updating the Reg State for all lines=1  
5820 DEB Mar 09 18:32:45.403051 (618:926) JAVA-SNAPSHOT-CREATE: CCAPI\_Line\_getLineInfo: reference pointer=b4af9478  
5821 DEB Mar 09 18:32:45.403204 (618:926) JAVA-SIPCC-SIP\_CC\_PROV: ccsnap\_gen\_lineEvent: event type : REG\_STATE  
5822 DEB Mar 09 18:32:45.403296 (618:926) JAVA-[[MESSAGE\_1.0]]: [SIPCC] --> REG\_STATE() --> [PHONE-APP] :  
5823 DEB Mar 09 18:32:45.403601 (618:926) JAVA-SIPCC-SIP\_CC\_PROV: 1/0, CCAPI\_lineInfo\_getRegState: returned 0  
5824 DEB Mar 09 18:32:45.403723 (618:926) JAVA-[[MESSAGE\_1.0]]: [PHONE-APP] --> getRegState() --> [SIPCC] : sipcc resp: line 1 (|2222) is NOT REGISTERED  
5825 NOT Mar 09 18:32:45.404120 (618:926) JAVA-Thread-4|cip.sipcc.SipCcAdapter\$CcMgmtListener: - lineNotify():mgmtState=MGMT\_AWAITING\_CFG\_SYNC(8) line=1 registered=false inService=true regRequired = true  
5826 DEB Mar 09 18:32:45.405096 (618:926) JAVA-SNAPSHOT-RELEASE: CCAPI\_Line\_releaseLineInfo: reference pointer=b4af9478, ref released  
5827 DEB Mar 09 18:32:45.405371 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND: ccsip\_register\_send\_msg:

cmd=85=SIP\_REG\_REQ ndx=97  
5828 DEB Mar 09 18:32:45.405585 (618:927) JAVA-SIP : sip\_platform\_cc\_mode\_update : mode =0  
5829 NOT Mar 09 18:32:45.405829 (618:927) JAVA-MED : updatePresentationCapTblValues : enter...  
5830 NOT Mar 09 18:32:45.405951 (618:927) JAVA-MED : updatePresentationCapTblValues : orig  
gcap[1,0,0,0]  
5831 NOT Mar 09 18:32:45.406103 (618:927) JAVA-MED : updatePresentationCapTblValues : new  
gcap[1,0,0,0]  
5832 DEB Mar 09 18:32:45.406195 (618:927) JAVA-MED : escalateDeescalate : Ignoring video cap  
update  
5833 NOT Mar 09 18:32:45.406287 (618:927) JAVA-MED : updateFeccCapTblValues : enter...  
5834 NOT Mar 09 18:32:45.406378 (618:927) JAVA-MED : updateFeccCapTblValues : orig gcap[0]  
5835 NOT Mar 09 18:32:45.406470 (618:927) JAVA-MED : updateFeccCapTblValues : new gcap[0]  
5836 DEB Mar 09 18:32:45.406531 (618:927) JAVA-MED : escalateDeescalate : Ignoring video cap  
update  
5837 NOT Mar 09 18:32:45.406622 (618:927) JAVA-SIPCC-SIP\_CTRL: sip\_restart: sip\_taskInited is  
set to true  
5838 NOT Mar 09 18:32:45.408331 (618:927) JAVA-SIPCC-CC\_API: 0/0, cc\_int\_fail\_fallback: SIP ->  
GSM: FAILOVER\_FALLBACK  
5839 DEB Mar 09 18:32:45.410315 (618:927) JAVA-SIPCC-MSG\_SEND\_REQ: SIPSPISendSubscribe: Sending  
SUBSCRIBE...  
5840 DEB Mar 09 18:32:45.415137 (618:927) JAVA-edge\_send\_get: Length of data read from  
edge\_gateway 64  
5841 DEB Mar 09 18:32:45.415382 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
tracking ID: 7821\_cead41d7-0010-5000-a000-c80084aa8743  
5842 DEB Mar 09 18:32:45.415534 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
local\_uuid: cead41d700105000a000c80084aa8743 remote\_uuid:  
5843 DEB Mar 09 18:32:45.415870 (618:927) JAVA-SIPCC-SIP\_SUB: sm\_add\_contact: adding device name  
[SEPC80084AA8743] to contact header  
5844 DEB Mar 09 18:32:45.416450 (618:927) JAVA-SIPCC-SIP\_SUB: sipSPIAddRouteHeadersToSubNot:  
Route info not available; will not add Route header.  
5845 DEB Mar 09 18:32:45.416602 (618:927) JAVA-SIPCC-SIP\_SUB: xmlEncodeEventData: Encode event  
data: entered,  
5846 DEB Mar 09 18:32:45.416725 (618:927) JAVA-SIPCC-SIP\_SUB: xmlEncodeEventData: Framed raw  
buffer: length = 570,  
5847 DEB Mar 09 18:32:45.417091 (618:927) JAVA-SIP : sipTransportCreateSendMessage :  
sippmh\_write() with message size=[1503]  
5848 NOT Mar 09 18:32:45.417304 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND: ccsip\_dump\_send\_msg\_info:  
<192.168.7.200:5060>:REFER s: <sip:192.168.7.200> :1000 REFER::c80084aa-87430006-1a48a291-  
451dd0ff@192.168.7.104  
5849 DEB Mar 09 18:32:45.417793 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage: Sip msg  
sent handle=<46>,length=<1503>, message=

##### 18:32:45.419807 || A REFER to the Home Cluster for the "DeviceTLInfo" alarm with the  
ITL/TFTP from the Visiting Cluster  
5850 DEB Mar 09 18:32:45.419807 (618:927) JAVA-sipio-sent---> REFER sip:192.168.7.200 SIP/2.0^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK20eb83bf^M  
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300122cd20b33-123852dd^M  
To: <sip:192.168.7.200>^M  
Call-ID: c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104^M  
Session-ID: cead41d700105000a000c80084aa8743;remote=00000000000000000000000000000000^M  
Date: Sat, 09 Mar 2019 18:32:45 GMT^M  
CSeq: 1000 REFER^M  
User-Agent: Cisco-CP7821/12.1.1^M  
Expires: 10^M  
Max-Forwards: 70^M  
Contact: <sip:04984998-fe29-08c0-6d47-  
5593bf4ce606@192.168.7.104:51778;transport=tcp>;+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743  
"^M  
Require: norefersub^M  
Referred-By: "2222" <sip:2222@192.168.7.104>^M  
Refer-To: cid:5098d8fa@192.168.7.104^M  
Content-Id: <5098d8fa@192.168.7.104>^M



Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE^M  
Content-Length: 569^M  
Content-Type: application/x-cisco-alarm+xml^M  
Content-Disposition: session/handling=required^M  
^M  
<?xml version="1.0" encoding="UTF-8"?>  
<x-cisco-alarm>  
<Alarm Name="DeviceT  
5851 DEB Mar 09 18:32:45.420021 (618:927) JAVA-LInfo">  
<ParameterList>  
<String name="DeviceName">SEPC80084AA8743</String>  
<String name="IPv4Address">192.168.7.104</String>  
<String name="IPv6Address"></String>  
<String name="CTL\_Signature">Not Installed</String>  
<String name="CTL\_TFTP\_Server">N/A</String>  
<String name="ITL\_Signature">1B A1 C9 07 E9 9E 4D 3C 53 9D C8 14 24 AF 6C 9F 7D CE 4D 6D  
</String>  
<String name="ITL\_TFTP\_Server">cucm-115.home.lab</String>  
<String name="StatusCode">3</String>  
</ParameterList>  
</Alarm>  
</x-cisco-alarm>  
5852 DEB Mar 09 18:32:45.420173 (618:927) JAVA-::End-Of-Sip-Message::  
5853 DEB Mar 09 18:32:45.420295 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage:  
Starting reTx timer for 32000 secs  
5854 DEB Mar 09 18:32:45.420784 (618:927) JAVA-[[MESSAGE\_1.0]]: [SIPCC] --> REFER  
sip:192.168.7.200 SIP/2.0() --> [192.168.7.200] :  
5855 DEB Mar 09 18:32:45.421486 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_send\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:0, state:0  
5856 DEB Mar 09 18:32:45.421638 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_send\_msg\_for\_alarm: Sent:REFER sip:192.168.7.200 SIP/2.0 Cseq:1000 REFER  
CallId:c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104  
5857 DEB Mar 09 18:32:45.422157 (618:927) JAVA-SIPCC-MSG\_SEND\_REQ: SIPSPISendSubscribe: Sending  
SUBSCRIBE...  
5858 NOT Mar 09 18:32:45.423134 (624:624) metmand-update\_sessionid: Received NULL or Invalid  
Type  
5859 NOT Mar 09 18:32:45.423286 (624:624) metmand-update\_sessionid: Local UUID:  
5860 NOT Mar 09 18:32:45.423408 (624:624) metmand-update\_sessionid: Remote UUID:  
5861 DEB Mar 09 18:32:45.426064 (618:927) JAVA-edge\_send\_get: Length of data read from  
edge\_gateway 64  
5862 DEB Mar 09 18:32:45.426308 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
tracking ID: 7821\_cead41d7-0010-5000-a000-c80084aa8743  
5863 DEB Mar 09 18:32:45.426430 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
local\_uuid: cead41d700105000a000c80084aa8743 remote\_uuid:  
5864 DEB Mar 09 18:32:45.426766 (618:927) JAVA-SIPCC-SIP\_SUB: sm\_add\_contact: adding device name  
[SEPC80084AA8743] to contact header  
5865 DEB Mar 09 18:32:45.427803 (618:927) JAVA-SIPCC-SIP\_SUB: sipSPIAddRouteHeadersToSubNot:  
Route info not available; will not add Route header.  
5866 DEB Mar 09 18:32:45.427956 (618:927) JAVA-SIPCC-SIP\_SUB: xmlEncodeEventData: Encode event  
data: entered,  
5867 DEB Mar 09 18:32:45.428109 (618:927) JAVA-SIPCC-SIP\_SUB: xmlEncodeEventData: Framed raw  
buffer: length = 573,  
5868 DEB Mar 09 18:32:45.428505 (618:927) JAVA-SIP : sipTransportCreateSendMessage :  
sippmh\_write() with message size=[1506]  
5869 NOT Mar 09 18:32:45.428689 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND: ccsip\_dump\_send\_msg\_info:  
<192.168.7.200:5060>:REFER s: <sip:192.168.7.200> :1000 REFER:c80084aa-87430007-4ba0abc2-  
6f7623e8@192.168.7.104  
5870 DEB Mar 09 18:32:45.429177 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage: Sip msg  
sent handle=<46>,length=<1506>,message=

##### 18:32:45.430978 || A REFER to the Home Cluster for the "DeviceTLInfo" alarm with the  
ITL/TFTP from the Home Cluster

5871 DEB Mar 09 18:32:45.430978 (618:927) JAVA-sipio-sent---> REFER sip:192.168.7.200 SIP/2.0^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK63f5b3c9^M  
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300136f85470f-0b656e67^M  
To: <sip:192.168.7.200>^M  
Call-ID: c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104^M  
Session-ID: cead41d700105000a000c80084aa8743;remote=00000000000000000000000000000000^M  
Date: Sat, 09 Mar 2019 18:32:45 GMT^M  
CSeq: 1000 REFER^M  
User-Agent: Cisco-CP7821/12.1.1^M  
Expires: 10^M  
Max-Forwards: 70^M  
Contact: <sip:04984998-fe29-08c0-6d47-5593bf4ce606@192.168.7.104:51778;transport=tcp>;+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743"  
^M  
Require: norefersub^M  
Referred-By: "2222" <sip:2222@192.168.7.104>^M  
Refer-To: cid:3801f297@192.168.7.104^M  
Content-Id: <3801f297@192.168.7.104>^M  
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE^M  
Content-Length: 572^M  
Content-Type: application/x-cisco-alarm+xml^M  
Content-Disposition: session;handling=required^M  
^M  
<?xml version="1.0" encoding="UTF-8"?>  
<x-cisco-alarm>  
<Alarm Name="DeviceT  
5872 DEB Mar 09 18:32:45.431161 (618:927) JAVA-LInfo">  
<ParameterList>  
<String name="DeviceName">SEPC80084AA8743</String>  
<String name="IPv4Address">192.168.7.104</String>  
<String name="IPv6Address"></String>  
<String name="CTL\_Signature">Not Installed</String>  
<String name="CTL\_TFTP\_Server">N/A</String>  
<String name="ITL\_Signature">A3 6D CF 5D 1E 65 4D 76 CD E3 62 4B 22 BD 45 CF 85 75 44 A6  
</String>  
<String name="ITL\_TFTP\_Server">clstr-2-pub.home.lab</String>  
<String name="StatusCode">3</String>  
</ParameterList>  
</Alarm>  
</x-cisco-alarm>  
5873 DEB Mar 09 18:32:45.431283 (618:927) JAVA-::End-Of-Sip-Message::  
5874 DEB Mar 09 18:32:45.431405 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage:  
Starting reTx timer for 32000 secs  
5875 DEB Mar 09 18:32:45.432168 (618:927) JAVA-[[MESSAGE\_1.0]]: [SIPCC] --> REFER  
sip:192.168.7.200 SIP/2.0() --> [192.168.7.200] :  
5876 DEB Mar 09 18:32:45.432931 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_send\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:0, state:0  
5877 DEB Mar 09 18:32:45.433083 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_send\_msg\_for\_alarm: Sent:REFER sip:192.168.7.200 SIP/2.0 Cseq:1000 REFER  
CallId:c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104  
5878 DEB Mar 09 18:32:45.433358 (618:927) JAVA-SIPCC-SIP\_STATE: 97/1, sip\_reg\_sm\_change\_state:  
Registration state change: SIP\_REG\_STATE\_IDLE ---> SIP\_REG\_STATE\_IDLE  
5879 DEB Mar 09 18:32:45.433816 (618:927) JAVA-SIPCC-SIP\_STATE: 1/0, sip\_stop\_ack\_timer: ccb->  
index=97 ack\_timer\_index=0  
5880 DEB Mar 09 18:32:45.433969 (618:927) JAVA-SIPCC-SIP\_STATE: 1/0, sip\_start\_ack\_timer: ccb->  
index=97 ack\_timer\_index=0  
5881 NOT Mar 09 18:32:45.434548 (624:624) metmand-update\_sessionid: Received NULL or Invalid  
Type  
5882 NOT Mar 09 18:32:45.434701 (624:624) metmand-update\_sessionid: Local UUID:  
5883 NOT Mar 09 18:32:45.434762 (624:624) metmand-update\_sessionid: Remote UUID:  
5884 DEB Mar 09 18:32:45.435098 (618:927) JAVA-[getDeployMode] deploy-mode:1  
5885 DEB Mar 09 18:32:45.435647 (618:927) JAVA-SIPCC-SIP\_REG: ccsip\_is\_reg\_refresh: Registration  
Refresh is FALSE  
5886 DEB Mar 09 18:32:45.435800 (618:927) JAVA-SIPCC-SIP\_REG\_BULK: ccsip\_handle\_ev\_reg\_req: Bulk

Reg Conditions met

```
5887 DEB Mar 09 18:32:45.436380 (618:927) JAVA-[getDeployMode] deploy-mode:1
5888 DEB Mar 09 18:32:45.436624 (618:927) JAVA-SIPCC-MSG_SEND_REQ: sipSPIBuildRegisterHeaders:
Sending REGISTER...
5889 DEB Mar 09 18:32:45.439493 (618:927) JAVA-edge_send_get: Length of data read from
edge_gateway 64
5890 DEB Mar 09 18:32:45.439737 (618:927) JAVA-SIPCC-SIP_SESSION_ID: sipAddSessionIdHeader:
tracking ID: 7821_cead41d7-0010-5000-a000-c80084aa8743
5891 DEB Mar 09 18:32:45.439889 (618:927) JAVA-SIPCC-SIP_SESSION_ID: sipAddSessionIdHeader:
local_uuid: cead41d700105000a000c80084aa8743 remote_uuid:
5892 NOT Mar 09 18:32:45.440134 (618:927) JAVA-ccsip_messaging: sipSPIAddContactHeader:
CFGID_DEVICE_NAME = SEPC80084AA8743
5893 NOT Mar 09 18:32:45.440347 (618:927) JAVA-ccsip_messaging: sipSPIAddContactHeader: ccb-
>call_mode = 0, display_name = 2222
5894 DEB Mar 09 18:32:45.441080 (618:927) JAVA-VCM : vcmIsICESupported :
mediaTraversalMode(1)=Standard.
5895 DEB Mar 09 18:32:45.467144 (618:927) JAVA-[getDeployMode] deploy-mode:1
5896 DEB Mar 09 18:32:45.467327 (618:927) JAVA-SIPCC-SIP_SUB: xmlEncodeEventData: Encode event
data: entered,
5897 NOT Mar 09 18:32:45.467816 (618:927) JAVA-SIPCC-SIP_REG: addDefaultOptionInd: support bfc
p
1
5898 NOT Mar 09 18:32:45.467999 (618:927) JAVA-SIPCC-SIP_REG: addDefaultOptionInd:
frame_rcc_options_ind_msg: check mobility refresh 0
5899 NOT Mar 09 18:32:45.468090 (618:927) JAVA-SIPCC-SIP_REG: addDefaultOptionInd: support
flex_dscp=0
5900 NOT Mar 09 18:32:45.468914 (618:927) JAVA-SIPCC-SIP_REG: xmlEncodeEventData: returned
content after encoding:
<?xml version="1.0" encoding="UTF-8"?>
<x-cisco-remotecc-request>
  <optionsind>
    <combine max="6">
      <remotecc>
        <status></status>
      </remotecc>
      <service-control></service-control>
    </combine>
    <dialog usage="hook status">
      <unot></unot>
      <sub></sub>
    </dialog>
    <dialog usage="shared line">
      <unot></unot>
      <sub></sub>
    </dialog>
    <presence usage="blf speed dial">
      <unot></unot>
      <sub></sub>
    </presence>
    <joinreq></joinreq>
    <cfwdall-anyline></cfwdall-anyline>
    <coaching></coaching>
    <oosalarm></oosalarm>
    <rpidd-orig-called></rpidd-orig-called>
    <x-cisco-number></x-cisco-number>
    <bfcpc></bfcpc>
    <ix></ix>
    <gatewayrecording></gatewayrecording>
    <conferenceDisplayInstance></conferenceDisplayInstance>
  </optionsind>
</x-cisco-remotecc-request>
5901 DEB Mar 09 18:32:45.469067 (618:927) JAVA-SIPCC-SIP: addOptionsIndBody: Framed buffer:
length = 856,
5902 DEB Mar 09 18:32:45.469464 (618:927) JAVA-SIP : sipTransportCreateSendMessage :
sippmh_write() with message size=[2516]
```

5903 DEB Mar 09 18:32:45.470013 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage: Sip msg sent handle=<46>,length=<2516>, message=

##### 18:32:45.473187 || A register message to the CCM server on the Home Cluster  
5904 DEB Mar 09 18:32:45.473187 (618:927) JAVA-sipio-sent---> REGISTER sip:192.168.7.200 SIP/2.0^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK66da98ae^M  
From: <sip:2222@192.168.7.200>;tag=c80084aa8743001411d7279b-7ecf20ad^M  
To: <sip:2222@192.168.7.200>^M  
Call-ID: c80084aa-87430003-255b99f4-783a63d4@192.168.7.104^M  
Max-Forwards: 70^M  
Session-ID: cead41d700105000a000c80084aa8743;remote=00000000000000000000000000000000^M  
Date: Sat, 09 Mar 2019 18:32:45 GMT^M  
CSeq: 113 REGISTER^M  
User-Agent: Cisco-CP7821/12.1.1^M  
Contact: <sip:04984998-fe29-08c0-6d47-5593bf4ce606@192.168.7.104:51778;transport=tcp>;+sip.instance="<urn:uuid:00000000-0000-0000-0000-0000-c80084aa8743>";+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743";+u.sip!model.ccm.cisco.com="6211"  
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1^M  
Reason: SIP;cause=200;text="cisco-alarm:23 Name=SEPC80084AA8743 ActiveLoad=si

5905 DEB Mar 09 18:32:45.473370 (618:927) JAVA-p78xx.12-1-1-12.loads InactiveLoad=sip78xx.10-3-1-12.loads Last=reset-restart^M

Expires: 3600^M  
Content-Type: multipart/mixed; boundary=uniqueBoundary^M  
Mime-Version: 1.0^M  
Content-Length: 1313^M  
^M

--uniqueBoundary^M  
Content-Type: application/x-cisco-remotecc-request+xml^M  
Content-Disposition: session;handling=optional^M  
^M

```
<?xml version="1.0" encoding="UTF-8"?>
<x-cisco-remotecc-request>
<bulkregisterreq>
<contact all="true">
<register></register>
</contact>
</bulkregisterreq>
</x-cisco-remotecc-request>
```

^M  
--uniqueBoundary^M  
Content-Type: application/x-cisco-remotecc-request+xml^M  
Content-Disposition: session;handling=optional^M  
^M

```
<?xml version="1.0" encoding="UTF-8"?>
<x-cisco-remotecc-request>
  <optionsind>
    <combine max="6">
      <remotecc>
        <status></status>
      </remotecc>
      <service-control></service-control>
    </combine>
    <dialog usage="hook status">
      <unot></unot>
      <sub></sub>
    </dialog>
    <dialog usage="shared line">
```

```
<unot></unot>
<sub></sub>
</dialog>

5906 DEB Mar 09 18:32:45.473462 (618:927) JAVA-<presence usage="blf speed dial">
  <unot></unot>
  <sub></sub>
</presence>
<joinreq></joinreq>
<cfwdall-anyline></cfwdall-anyline>
<coaching></coaching>
<oosalarm></oosalarm>
<rp-id-orig-called></rp-id-orig-called>
<x-cisco-number></x-cisco-number>
<bfc-p></bfc-p>
<ix></ix>
<gatewayrecording></gatewayrecording>
<conferenceDisplayInstance></conferenceDisplayInstance>
</optionsind>
</x-cisco-remotecc-request>^M
--uniqueBoundary--^M
5907 DEB Mar 09 18:32:45.473584 (618:927) JAVA-::End-Of-Sip-Message::
5908 DEB Mar 09 18:32:45.473737 (618:927) JAVA-SIPCC-ENTRY: LINE 97/1: sipTransportSendMessage
: Stopping reTx timer
5909 DEB Mar 09 18:32:45.473859 (618:927) JAVA-[[MESSAGE_1.0]]: [SIPCC] --> REGISTER
sip:192.168.7.200 SIP/2.0() --> [192.168.7.200] :
5910 DEB Mar 09 18:32:45.474500 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_send_msg_for_alarm: local_uuid: , remote_uuid: , type:1, state:16
5911 DEB Mar 09 18:32:45.474652 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_send_msg_for_alarm: Sent:REGISTER sip:192.168.7.200 SIP/2.0 Cseq:113 REGISTER
CallId:c80084aa-87430003-255b99f4-783a63d4@192.168.7.104
5912 DEB Mar 09 18:32:45.474896 (618:927) JAVA-SIPCC-SIP_REG_BULK: ccsip_set_bulk_reg_status:
Transitioning bulk reg status from BULK_REG_NONE to BULK_REG_INITIATED
5913 DEB Mar 09 18:32:45.475018 (618:927) JAVA-SIPCC-SIP_STATE: 97/1, sip_reg_sm_change_state:
Registration state change: SIP_REG_STATE_IDLE ---> SIP_REG_STATE_REGISTERING
5914 NOT Mar 09 18:32:45.475659 (624:624) metmand-update_sessionid: Received NULL or Invalid
Type
5915 NOT Mar 09 18:32:45.475812 (624:624) metmand-update_sessionid: Local UUID:
5916 NOT Mar 09 18:32:45.475965 (624:624) metmand-update_sessionid: Remote UUID:
5917 DEB Mar 09 18:32:45.476880 (618:927) JAVA-SIPCC-HTTPISH: httpish_msg_process_network_msg:
Content Length 0, Bytes Remaining 703.
5918 DEB Mar 09 18:32:45.477094 (618:927) JAVA-SIP : sip_tcp_newmsg_to_spi : Sip message rcv:
message=

##### 18:32:45.477430 || The first REFER is accepted
5919 DEB Mar 09 18:32:45.477430 (618:927) JAVA-sipio-recv<--- SIP/2.0 202 Accepted^M
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK20eb83bf^M
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300122cd20b33-123852dd^M
To: <sip:192.168.7.200>;tag=417801073^M
Date: Sat, 09 Mar 2019 18:32:46 GMT^M
Call-ID: c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104^M
CSeq: 1000 REFER^M
Contact: <sip:192.168.7.200:5060;transport=tcp>^M
Content-Length: 0^M
^M
5920 DEB Mar 09 18:32:45.477552 (618:927) JAVA-::End-Of-Sip-Message::
5921 DEB Mar 09 18:32:45.477643 (618:927) JAVA-[[MESSAGE_1.0]]: [192.168.7.200] --> SIP/2.0 202
Accepted() --> [SIPCC] :
5922 NOT Mar 09 18:32:45.477796 (618:927) JAVA-SIPCC-SIP_MSG_RECV: ccsip_dump_rcv_msg_info:
<192.168.7.200:0 >:202 Acc: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300122cd20b33-
123852dd :1000 REFER::c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104
5923 DEB Mar 09 18:32:45.478376 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
```

ccsip\_store\_rcvd\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:0, state:0  
5924 DEB Mar 09 18:32:45.478528 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_rcvd\_msg\_for\_alarm: Rcvd:SIP/2.0 202 Accepted Cseq:1000 REFER CallId:c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104  
5925 DEB Mar 09 18:32:45.479230 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipGetSessionId: Remote Session ID: (null)  
5926 DEB Mar 09 18:32:45.479963 (618:927) JAVA-[getDeployMode] deploy-mode:1  
5927 DEB Mar 09 18:32:45.480176 (618:927) JAVA-SIPCC-SIP\_ALARM: remove\_stored\_alarm: Alarm at index=0 of request\_id=6 sent out successfully  
5928 DEB Mar 09 18:32:45.482099 (618:927) JAVA-SIPCC-HTTPISH: httpish\_msg\_process\_network\_msg: Content Length 0, Bytes Remaining 319.  
5929 DEB Mar 09 18:32:45.482313 (618:927) JAVA-SIP : sip\_tcp\_newmsg\_to\_spi : Sip message rcv: message=

##### 18:32:45.482679 || The second REFER is accepted

5930 DEB Mar 09 18:32:45.482679 (618:927) JAVA-sipio-recv<--- SIP/2.0 202 Accepted^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK63f5b3c9^M  
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300136f85470f-0b656e67^M  
To: <sip:192.168.7.200>;tag=231462831^M  
Date: Sat, 09 Mar 2019 18:32:46 GMT^M  
Call-ID: c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104^M  
CSeq: 1000 REFER^M  
Contact: <sip:192.168.7.200:5060;transport=tcp>^M  
Content-Length: 0^M  
^M  
5931 DEB Mar 09 18:32:45.482801 (618:927) JAVA-::End-Of-Sip-Message::  
5932 DEB Mar 09 18:32:45.482893 (618:927) JAVA-[MESSAGE\_1.0]: [192.168.7.200] --> SIP/2.0 202 Accepted() --> [SIPCC] :  
5933 NOT Mar 09 18:32:45.483045 (618:927) JAVA-SIPCC-SIP\_MSG\_RECV: ccsip\_dump\_rcv\_msg\_info: <192.168.7.200:0 >:202 Acc: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300136f85470f-0b656e67 :1000 REFER::c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104  
5934 DEB Mar 09 18:32:45.483625 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_rcvd\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:0, state:0  
5935 DEB Mar 09 18:32:45.483778 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_rcvd\_msg\_for\_alarm: Rcvd:SIP/2.0 202 Accepted Cseq:1000 REFER CallId:c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104  
5936 DEB Mar 09 18:32:45.484480 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipGetSessionId: Remote Session ID: (null)  
5937 DEB Mar 09 18:32:45.485243 (618:927) JAVA-[getDeployMode] deploy-mode:1  
5938 DEB Mar 09 18:32:45.485426 (618:927) JAVA-SIPCC-SIP\_ALARM: remove\_stored\_alarm: Alarm at index=1 of request\_id=7 sent out successfully  
5939 DEB Mar 09 18:32:45.486067 (618:927) JAVA-SIP : sip\_tcp\_newmsg\_to\_spi : Sip message rcv: message=

##### 18:32:45.486403 || The Home Cluster is trying to do the register

5940 DEB Mar 09 18:32:45.486403 (618:927) JAVA-sipio-recv<--- SIP/2.0 100 Trying^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK66da98ae^M  
From: <sip:2222@192.168.7.200>;tag=c80084aa8743001411d7279b-7ecf20ad^M  
To: <sip:2222@192.168.7.200>^M  
Date: Sat, 09 Mar 2019 18:32:46 GMT^M  
Call-ID: c80084aa-87430003-255b99f4-783a63d4@192.168.7.104^M  
CSeq: 113 REGISTER^M  
Content-Length: 0^M  
^M  
5941 DEB Mar 09 18:32:45.486525 (618:927) JAVA-::End-Of-Sip-Message::  
5942 DEB Mar 09 18:32:45.486647 (618:927) JAVA-[MESSAGE\_1.0]: [192.168.7.200] --> SIP/2.0 100 Trying() --> [SIPCC] :  
5943 DEB Mar 09 18:32:45.487562 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_rcvd\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:1, state:17  
5944 DEB Mar 09 18:32:45.487715 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:

ccsip\_store\_rcvd\_msg\_for\_alarm: Rcvd:SIP/2.0 100 Trying Cseq:113 REGISTER CallId:c80084aa-87430003-255b99f4-783a63d4@192.168.7.104  
5945 DEB Mar 09 18:32:45.488173 (618:927) JAVA-SIPCC-SIP\_BRANCH: sip\_sm\_ccb\_match\_branch\_cseq: Matched branch\_id & CSeq  
5946 DEB Mar 09 18:32:45.488325 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipGetSessionId: Remote Session ID: (null)  
5947 DEB Mar 09 18:32:45.489149 (618:927) JAVA-SIPCC-SIP\_RESP: sipSPICheckResponse: Response match: callid=c80084aa-87430003-255b99f4-783a63d4@192.168.7.104, cseq=113, cseq\_method=REGISTER  
5948 DEB Mar 09 18:32:45.489394 (618:927) JAVA-SIPCC-FUNC\_ENTRY: LINE 97/1: ccsip\_handle\_ev\_lxx : SIP\_REG\_STATE\_REGISTERING <- SIP(100)  
5949 NOT Mar 09 18:32:45.490370 (624:624) metmand-update\_sessionid: Received NULL or Invalid Type  
5950 NOT Mar 09 18:32:45.490523 (624:624) metmand-update\_sessionid: Local UUID:  
5951 NOT Mar 09 18:32:45.490614 (624:624) metmand-update\_sessionid: Remote UUID:  
5952 NOT Mar 09 18:32:45.490828 (624:624) metmand-update\_sessionid: Received NULL or Invalid Type  
5953 NOT Mar 09 18:32:45.490920 (624:624) metmand-update\_sessionid: Local UUID:  
5954 NOT Mar 09 18:32:45.491011 (624:624) metmand-update\_sessionid: Remote UUID:  
5955 NOT Mar 09 18:32:45.491164 (624:624) metmand-update\_sessionid: Received NULL or Invalid Type  
5956 NOT Mar 09 18:32:45.491255 (624:624) metmand-update\_sessionid: Local UUID:  
5957 NOT Mar 09 18:32:45.491316 (624:624) metmand-update\_sessionid: Remote UUID:  
5958 INF Mar 09 18:32:45.508316 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel:? - OverviewModel-----propertychange  
regPromptProperty.getValue() = Registration in progress  
5959 DEB Mar 09 18:32:45.508835 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel\$MyCallAgentListener:OverviewModel notifyDisplay -  
++++bug 1015782 debug++++ notifyText=Registering  
5960 DEB Mar 09 18:32:45.509171 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel\$MyCallAgentListener:OverviewModel notifyDisplay -  
++++bug 1015782 debug++++ isRegistered=false  
5961 ERR Mar 09 18:32:45.509567 (618:891) JAVA-System P7-display  
MQThread|cip.app.AppFrame:startNotification - Notification: Registeringcan't be display in status prompt  
5962 INF Mar 09 18:32:45.510880 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel:? - OverviewModel-----hasServer  
headSubPromptVal: false  
5963 DEB Mar 09 18:32:45.540942 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo: g\_deviceInfo.ins\_state=2  
5964 DEB Mar 09 18:32:45.541156 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo: deviceInfo->sis\_name=  
5965 DEB Mar 09 18:32:45.541248 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo: reference pointer=b4af9478  
5966 DEB Mar 09 18:32:45.541370 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo: deviceInfo->ins\_state=2  
5967 DEB Mar 09 18:32:45.541492 (618:891) JAVA-SIPCC-SIP\_CC\_PROV: 0xb4af9478,  
CCAPI\_DeviceInfo\_getCUCMMode: returned 00  
5968 DEB Mar 09 18:32:45.541766 (618:891) JAVA-SNAPSHOT-RELEASE: CCAPI\_Device\_releaseDeviceInfo: reference pointer=b4af9478  
5969 DEB Mar 09 18:32:45.593560 (618:927) JAVA-SIPCC-HTTPISH: httpish\_msg\_process\_network\_msg: Content Length 381, Bytes Remaining 1615.  
5970 DEB Mar 09 18:32:45.593956 (618:927) JAVA-SIP : sip\_tcp\_newmsg\_to\_spi : Sip message rcv: message=

##### 18:32:45.595055 || The Home Cluster successfully did the register  
5971 DEB Mar 09 18:32:45.595055 (618:927) JAVA-sipio-recv<--- SIP/2.0 200 OK^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK66da98ae^M  
From: <sip:2222@192.168.7.200>;tag=c80084aa8743001411d7279b-7ecf20ad^M  
To: <sip:2222@192.168.7.200>;tag=2121423204^M  
Date: Sat, 09 Mar 2019 18:32:46 GMT^M  
Call-ID: c80084aa-87430003-255b99f4-783a63d4@192.168.7.104^M  
Server: Cisco-CUCM11.5^M

```

CSeq: 113 REGISTER^M
Expires: 120^M
Contact: <sip:04984998-fe29-08c0-6d47-5593bf4ce606@192.168.7.104:51778;transport=tcp>;+sip.instance="<urn:uuid:00000000-0000-0000-0000-c80084aa8743>;+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743";+u.sip!model.ccm.cisco.com="621";x-cisco-newreg^M
Supported: X-cisco-srtp-fallback,X-cisco-sis-8.0.0^M
Content-Type: application/x-cisco-remotecc-response+xml^M
Content-Length: 381^M
^M
<x-cisco-remotecc-response>
<response>
<code>200</code>
<optionsind>
<combine max="6">
<remotecc><status/></remotecc>
<service-control/>
</combine>
<dialog usage="hook status"><unot/></dialog>
<dialog usage="shared line"><unot/></dialog>
<presence usage="blf speed dial"><unot/></p>
5972 DEB Mar 09 18:32:45.595238 (618:927) JAVA-resence>
<joinreq></joinreq>
<ix/>
<bfcf/>
</optionsind>
</response>
</x-cisco-remotecc-response>
^M
5973 DEB Mar 09 18:32:45.595391 (618:927) JAVA-::End-Of-Sip-Message::
5974 DEB Mar 09 18:32:45.595513 (618:927) JAVA-[[MESSAGE_1.0]]: [192.168.7.200] --> SIP/2.0 200
OK() --> [SIPCC] :

```

## فتاهل ل PCAP ةعجارم

ديق ان عل او فتاهل ني ب رورم ل ة ك ح لك ح شر م ل ا ذه ضرعي

**ip.addr == 192.168.7.100 || ip.addr == 192.168.7.100**

ة م ا ه ل رورم ل ة ك ح راه ظ ا ل ه ص ي ل ق ت ب ح شر م ل ا ذه م و ق ي

**((ip.addr= 192.168.7.100 || ip.addr == 192.168.7.200) & (sip || http || tcp.port == 2445 || udp.port == 69) & (frame.number <= 596))**

No.	Time	Source	Destination	Protocol	Length	Info
5	0.788879	192.168.7.104	192.168.7.100	SIP	1034	Request: REGISTER sip:192.168.7.100 (1 binding)
6	0.789738	192.168.7.100	192.168.7.104	SIP	385	Status: 100 Trying
8	0.790626	192.168.7.100	192.168.7.104	SIP	719	Status: 200 OK (1 binding)



phone\_pcap.pcapng The EMCC service is selected and the user logs into the service

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
127	11.984091	192.168.7.104	192.168.7.100	HTTP	571	GET /emapp/EMAppServlet?device=SEPC80084AA8743&EMCC=true HTTP/1.1
131	12.162613	192.168.7.100	192.168.7.104	HTTP/XML	972	HTTP/1.1 200 OK
249	21.495892	192.168.7.104	192.168.7.100	HTTP	595	GET /emapp/EMAppServlet?device=SEPC80084AA8743&EMCC=true&seq=134679&userid=adgjm HTTP/1.1
263	21.974894	192.168.7.100	192.168.7.104	HTTP/XML	712	HTTP/1.1 200 OK
276	22.291842	192.168.7.104	192.168.7.100	HTTP	580	GET /emapp/EMAppServlet?refresh=SEPC80084AA8743%23Login&EMCC=true HTTP/1.1
278	22.298924	192.168.7.100	192.168.7.104	HTTP/XML	787	HTTP/1.1 200 OK
322	26.413083	192.168.7.104	192.168.7.100	HTTP	546	GET /emapp/jsp/initservices.jsp HTTP/1.1
324	26.413935	192.168.7.100	192.168.7.104	HTTP/XML	522	HTTP/1.1 200 OK

phone\_pcap.pcapng The phone receives a notify telling it to restart. After the restart the phone registers back with the visiting cluster

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
342	26.587478	192.168.7.100	192.168.7.104	SIP	631	Request: NOTIFY sip:1000@192.168.7.104:49921   (text/plain)
344	26.599787	192.168.7.104	192.168.7.100	SIP	430	Status: 200 OK
349	26.666236	192.168.7.104	192.168.7.100	SIP	963	Request: REFER sip:192.168.7.100
352	26.669085	192.168.7.100	192.168.7.104	SIP	451	Status: 202 Accepted
355	27.021115	192.168.7.104	192.168.7.100	SIP	1205	Request: REFER sip:192.168.7.100
357	27.023629	192.168.7.100	192.168.7.104	SIP	451	Status: 202 Accepted
359	27.070842	192.168.7.104	192.168.7.100	SIP	1188	Request: REGISTER sip:192.168.7.100 (remove 1 binding)
360	27.071524	192.168.7.100	192.168.7.104	SIP	385	Status: 100 Trying
362	27.072653	192.168.7.100	192.168.7.104	SIP	484	Status: 200 OK (0 bindings)

phone\_pcap.pcapng The phone requests the CTL/ITL/CNF from the visiting cluster

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
372	27.468600	192.168.7.104	192.168.7.100	HTTP	131	GET /CTLSEPC80084AA8743.tlv HTTP/1.1
374	27.468859	192.168.7.100	192.168.7.104	HTTP	130	HTTP/1.1 404 Not Found
382	27.642250	192.168.7.104	192.168.7.100	HTTP	131	GET /ITLSEPC80084AA8743.tlv HTTP/1.1
397	27.643612	192.168.7.100	192.168.7.104	HTTP	686	HTTP/1.1 200 OK (*/*)
411	28.482515	192.168.7.104	192.168.7.100	HTTP	136	GET /SEPC80084AA8743.cnf.xml.sgn HTTP/1.1
415	28.492222	192.168.7.100	192.168.7.104	HTTP	831	HTTP/1.1 200 OK (*/*)

phone\_pcap.pcapng The phone requests the CTL from the home cluster but there isn't one. Then the phone requests the ITL and needs to engage TVS on the VC to validate the signer.

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
445	31.697951	192.168.7.200	192.168.7.104	HTTP	140	HTTP/1.1 503 Service Unavailable
456	32.470464	192.168.7.104	192.168.7.200	TFTP	73	Read Request, File: CTLSEPC80084AA8743.tlv, Transfer type: octet
461	32.652384	192.168.7.104	192.168.7.200	HTTP	131	GET /ITLSEPC80084AA8743.tlv HTTP/1.1
472	32.653307	192.168.7.200	192.168.7.104	HTTP	705	HTTP/1.1 200 OK (*/*)
482	32.833207	192.168.7.104	192.168.7.100	TCP	74	51672 → 2445 [SYN] Seq=0 Win=29200 Len=0 MSS=1460 SACK_PERM=1 TSval=215005 TSecr=0 WS=16
483	32.833282	192.168.7.100	192.168.7.104	TCP	74	2445 → 51672 [SYN, ACK] Seq=0 Ack=1 Win=14480 Len=0 MSS=1460 SACK_PERM=1 TSval=1807489 TSecr=215005 WS=128
484	32.833575	192.168.7.104	192.168.7.100	TCP	66	51672 → 2445 [ACK] Seq=1 Ack=1 Win=29200 Len=0 TSval=215005 TSecr=1807489
485	32.846664	192.168.7.104	192.168.7.100	TLSv1.2	190	Client Hello
486	32.846847	192.168.7.100	192.168.7.104	TCP	66	2445 → 51672 [ACK] Seq=1 Ack=125 Win=14592 Len=0 TSval=1807503 TSecr=215006
487	32.847319	192.168.7.100	192.168.7.104	TLSv1.2	1175	Server Hello, Certificate, Server Hello Done
488	32.847505	192.168.7.104	192.168.7.100	TCP	66	51672 → 2445 [ACK] Seq=125 Ack=1110 Win=31424 Len=0 TSval=215007 TSecr=1807503
490	33.362164	192.168.7.104	192.168.7.100	TLSv1.2	408	Client Key Exchange, Change Cipher Spec, Encrypted Handshake Message
491	33.370101	192.168.7.100	192.168.7.104	TLSv1.2	316	New Session Ticket, Change Cipher Spec, Encrypted Handshake Message
492	33.370374	192.168.7.104	192.168.7.100	TCP	66	51672 → 2445 [ACK] Seq=467 Ack=1360 Win=33648 Len=0 TSval=215059 TSecr=1808026
495	33.866946	192.168.7.104	192.168.7.100	TLSv1.2	295	Application Data
496	33.867758	192.168.7.100	192.168.7.104	TLSv1.2	1111	Application Data
497	33.867851	192.168.7.104	192.168.7.100	TCP	66	51672 → 2445 [ACK] Seq=696 Ack=2405 Win=35856 Len=0 TSval=215109 TSecr=1808523

phone\_pcap.pcapng The phone requests its config file and softkey template from the home cluster. Then the phone moves forward with registering to the home cluster.

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
509	35.090712	192.168.7.104	192.168.7.200	HTTP	136	GET /SEPC80084AA8743.cnf.xml.sgn HTTP/1.1
526	35.103308	192.168.7.200	192.168.7.104	HTTP	759	HTTP/1.1 200 OK (*/*)
548	37.509328	192.168.7.104	192.168.7.200	HTTP	155	GET /SKb0ec918f-b9ee-994b-57ae-345883c1fed8.xml.sgn HTTP/1.1
554	37.510070	192.168.7.200	192.168.7.104	HTTP	1307	HTTP/1.1 200 OK (*/*)
570	38.784266	192.168.7.104	192.168.7.200	SIP	121	Request: REFER sip:192.168.7.200
573	38.786423	192.168.7.200	192.168.7.104	SIP	450	Status: 202 Accepted
576	38.794933	192.168.7.104	192.168.7.200	SIP	124	Request: REFER sip:192.168.7.200
578	38.796188	192.168.7.200	192.168.7.104	SIP	451	Status: 202 Accepted
581	38.838310	192.168.7.104	192.168.7.200	SIP	1134	Request: REGISTER sip:192.168.7.200 (1 binding)   (application/x-cisco-remotecr-request+xml) (application/x-cisco-remotecr-request+xml)
583	38.838805	192.168.7.200	192.168.7.104	SIP	385	Status: 100 Trying
585	38.955146	192.168.7.200	192.168.7.104	SIP	1175	Status: 200 OK (1 binding)
586	38.955436	192.168.7.200	192.168.7.104	SIP	1299	Request: REFER sip:04984998-fe29-08c0-6d47-5593bf4ce600@192.168.7.104:50600;transport=tcp   (application/x-cisco-remotecr-request+xml) (text/plain)
590	39.251901	192.168.7.104	192.168.7.200	SIP	977	Request: REFER sip:192.168.7.200
592	39.253935	192.168.7.200	192.168.7.104	SIP	451	Status: 202 Accepted
596	39.262602	192.168.7.104	192.168.7.200	SIP	637	Status: 200 OK

## ةلص تاذا تامولعم

- [Cisco نم 11.x نواعتلا ماظنل \(SRND\) لولحلل اعجرم ةكبش تاميمصت](#)
- [EMCC نم اهن يوكتو تاملكملا هيحوت حرش](#)
- [ةمظنأل Cisco - تادن تسمل او ينقتلا معدلا](#)

ةمچرتل هذه لوج

ةللأل تاي نقتل نمة ومة مادختساب دن تسمل اذة Cisco تمةرت  
ملاعلاء انء مء مء نمة دختسمل معد ى وتحم مء دقتل ةر شبل او  
امك ةق قء نوك ت نل ةللأل ةمچرت لصف أن ةظحال مء ءرء. ةصاأل مء تءل ب  
Cisco ةللخت. فرتحم مچرت مءم دقء ةللأل ةل فارتحال ةمچرتل عم لاعل او  
ىل إأمءءاد ءوچرلاب ةصوء و تاملرتل هذه ةقء نء اهءل ءوئس م Cisco  
Systems (رفوتم طبارل) ةل صأل ةل ءل ءن إل دن تسمل