

# 在RV320和RV325路由器上配置通用即插即用(UPnP)

## 目標

通用即插即用(UPnP)是一組網路協定，允許裝置在網路上發現彼此。發現的裝置可以建立用於資料共用、通訊和娛樂的網路服務。UPnP可用於設定網路上的公共服務。啟用UPnP功能後，作業系統可以向UPnP轉發表新增或刪除條目。

本文檔旨在展示如何在RV320和RV325路由器上啟用UPnP並管理UPnP埠轉發表。

## 適用裝置

·RV320


·RV325

## 軟體版本

·1.1.1.19

## 啟用UPnP

步驟1.登入到Web配置實用程式並選擇Firewall > General。General視窗開啟。

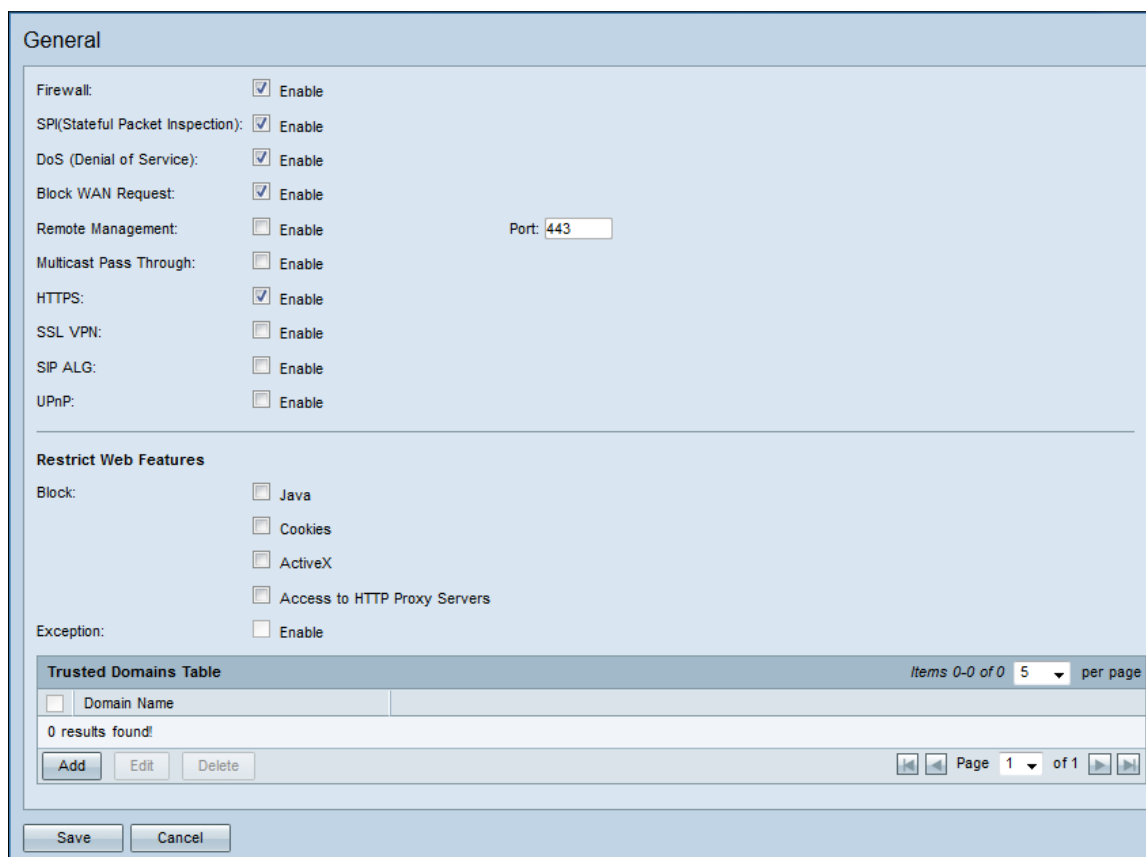

The screenshot shows the 'General' configuration page. Under the 'Firewall' section, the 'UPnP' checkbox is checked. Below this, there is a 'Restrict Web Features' section with several unchecked options. At the bottom, there is a 'Trusted Domains Table' which is currently empty. The 'Save' button is highlighted.

Firewall:	<input checked="" type="checkbox"/> Enable
SP(Stateful Packet Inspection):	<input checked="" type="checkbox"/> Enable
DoS (Denial of Service):	<input checked="" type="checkbox"/> Enable
Block WAN Request:	<input checked="" type="checkbox"/> Enable
Remote Management:	<input type="checkbox"/> Enable
Multicast Pass Through:	<input type="checkbox"/> Enable
HTTPS:	<input checked="" type="checkbox"/> Enable
SSL VPN:	<input type="checkbox"/> Enable
SIP ALG:	<input type="checkbox"/> Enable
UPnP:	<input checked="" type="checkbox"/> Enable

Port: 443

**Restrict Web Features**

Block:

- Java
- Cookies
- ActiveX
- Access to HTTP Proxy Servers

Exception:  Enable

**Trusted Domains Table** Items 0-0 of 0 5 per page

Domain Name
0 results found!

Add Edit Delete Page 1 of 1

Save Cancel

步驟2.選中UPnP欄位中的Enable覈取方塊。

Firewall:	<input checked="" type="checkbox"/>	Enable	
SPI(Stateful Packet Inspection):	<input checked="" type="checkbox"/>	Enable	
DoS (Denial of Service):	<input checked="" type="checkbox"/>	Enable	
Block WAN Request:	<input checked="" type="checkbox"/>	Enable	
Remote Management:	<input type="checkbox"/>	Enable	Port: <input type="text" value="443"/>
Multicast Pass Through:	<input type="checkbox"/>	Enable	
HTTPS:	<input checked="" type="checkbox"/>	Enable	
SSL VPN:	<input type="checkbox"/>	Enable	
SIP ALG:	<input type="checkbox"/>	Enable	
UPnP:	<input checked="" type="checkbox"/>	Enable	

步驟3.按一下「Save」。

General

Firewall:	<input checked="" type="checkbox"/>	Enable	
SPI(Stateful Packet Inspection):	<input checked="" type="checkbox"/>	Enable	
DoS (Denial of Service):	<input checked="" type="checkbox"/>	Enable	
Block WAN Request:	<input checked="" type="checkbox"/>	Enable	
Remote Management:	<input type="checkbox"/>	Enable	Port: <input type="text" value="443"/>
Multicast Pass Through:	<input type="checkbox"/>	Enable	
HTTPS:	<input checked="" type="checkbox"/>	Enable	
SSL VPN:	<input type="checkbox"/>	Enable	
SIP ALG:	<input type="checkbox"/>	Enable	
UPnP:	<input checked="" type="checkbox"/>	Enable	

Restrict Web Features

Block:

- Java
- Cookies
- ActiveX
- Access to HTTP Proxy Servers

Exception:  Enable

Trusted Domains Table Items 0-0 of 0 5 per page

<input type="checkbox"/>	Domain Name
0 results found!	

## 管理UPnP埠轉發表

步驟1.在Web配置實用程式邊欄中，選擇Setup > Port Address Translation。Port Address Translation 視窗開啟：

Port Address Translation

Port Address Translation Table Items 0-0 of 0 5 per page

<input type="checkbox"/> Service	Name or IP Address	Status
0 results found!		

Add Edit Delete Service Management ...

Page 1 of 1

---

UPnP Port Forwarding Table Items 0-0 of 0 5 per page

<input type="checkbox"/> Service	Name or IP Address	Status
0 results found!		

Delete

Page 1 of 1

Save Cancel

附註：您可以在UPnP埠轉發表中檢視使用UPnP協定的所有裝置和應用。*Service*欄位對應於使用UPnP的裝置或服務的名稱以及開啟的埠。*Name or IP Address*欄位對應於分配給裝置或服務的IP地址。*Status*欄位對應於裝置或服務是否正在使用UPnP。

步驟2. ( 可選 ) 要刪除條目，請選中所需服務旁邊的覈取方塊。

Port Address Translation

Port Address Translation Table Items 1-1 of 1 5 per page

<input type="checkbox"/> Service	Name or IP Address	Status
0 results found!		

Add Edit Delete Service Management ...

Page 1 of 1

---

UPnP Port Forwarding Table Items 0-0 of 0 5 per page

<input type="checkbox"/> Service	Name or IP Address	Status
<input checked="" type="checkbox"/> DNS[UDP/53-53]	192.168.1.1	Disabled

Delete

Page 1 of 1

Save Cancel

步驟3. ( 可選 ) 按一下Delete刪除該服務。

Port Address Translation

Port Address Translation Table Items 1-1 of 1 5 per page

<input type="checkbox"/> Service	Name or IP Address	Status
0 results found!		

Add Edit Delete Service Management ...

Page 1 of 1

---

UPnP Port Forwarding Table Items 0-0 of 0 5 per page

<input type="checkbox"/> Service	Name or IP Address	Status
<input checked="" type="checkbox"/> DNS[UDP/53-53]	192.168.1.1	Disabled

Delete

Page 1 of 1

Save Cancel

步驟4. 按一下「Save」。

## Port Address Translation

### Port Address Translation Table

Items 0-0 of 0 5 per page

<input type="checkbox"/>	Service	Name or IP Address	Status	
--------------------------	---------	--------------------	--------	--

0 results found!

Add

Edit

Delete

Service Management...

Page 1 of 1

### UPnP Port Forwarding Table

Items 0-0 of 0 5 per page

<input type="checkbox"/>	Service	Name or IP Address	Status	
--------------------------	---------	--------------------	--------	--

0 results found!

Delete

Page 1 of 1

Save

Cancel