

엔터프라이즈 채팅 및 이메일에 대한 주변 장치 게이트웨이 로그 분석 문제 해결 - 채팅 워크플로

목차

[소개](#)

[사전 요구 사항](#)

[요구 사항](#)

[사용되는 구성 요소](#)

[문제 해결](#)

소개

이 문서에서는 엔터프라이즈 채팅 및 전자 메일 - 채팅 작업 흐름용 주변 장치 게이트웨이 로그 분석의 문제 해결 프로세스에 대해 설명합니다.

사전 요구 사항

ECE 11.6(클라우드 구축에도 적용)

UCCE 11.6

요구 사항

다음 주제에 대한 지식을 보유하고 있으면 유용합니다.

- ECE
- UCCE(Unified Contact Center Enterprise)

사용되는 구성 요소

이 문서의 정보는 UCCE 11.6 및 ECE 11.6.1 ES 6 ES6_1A를 기반으로 합니다.


이 문서의 정보는 특정 랩 환경의 디바이스를 토대로 작성되었습니다.이 문서에 사용된 모든 디바이스는 초기화된(기본) 컨피그레이션으로 시작되었습니다.네트워크가 작동 중인 경우 모든 명령의 잠재적인 영향을 이해해야 합니다.

문제 해결

케이스 1. 상담원 표시는 채팅에 사용할 수 있습니다.

검토할 로그:ECE의 리스너

ICM의 CTIServer 및 에이전트 PG OPC 로그

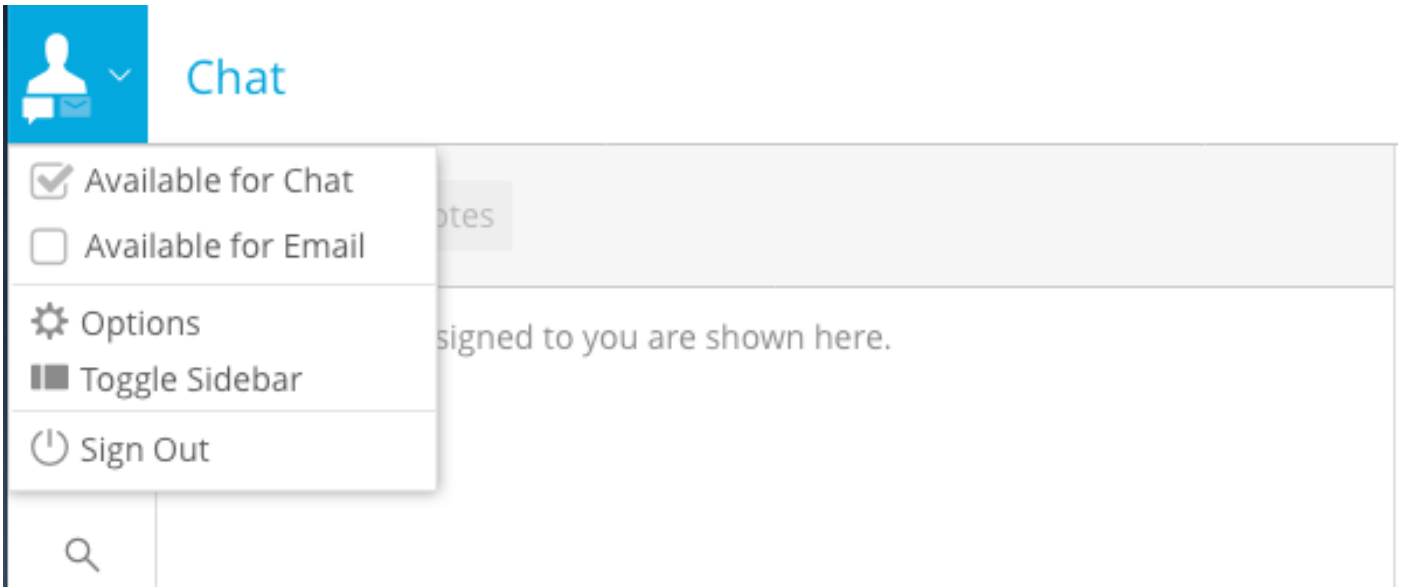

ICM CTIServer 로그용 코드 조각:

ECE에서 리스너 프로세스에서 "MAKE_AGENT_ROUTABLE_IND"를 받았습니다.

```
10:06:31:759 cgl1a-ctisvr Session 1: MsgType:MAKE_AGENT_ROUTABLE_IND (InvokeID:0xa233 MRDID:5001
ICMAgentID:5001 MaxTasks:1 )
10:06:31:759 cgl1a-ctisvr Trace: ProcessMakeAgentRoutableInd - sessionID 1
10:06:31:759 cgl1a-ctisvr Trace: SendARMMsg -- InvokeID = 41523, MRDID = 5001, ICMAgentID = 5001,
MaxTasks = 1, SessionID = 1
```

```
10:06:31:759 cgl1a-ctisvr Session 1: MsgType:MAKE_AGENT_READY_IND (InvokeID:0xa234 MRDID:5001
ICMAgentID:5001 MakeRoutable:True )
10:06:31:759 cgl1a-ctisvr Trace: ProcessMakeAgentReadyInd - sessionID 1
10:06:31:759 cgl1a-ctisvr Trace: SendARMMsg -- InvokeID = 41524, MRDID = 5001, ICMAgentID = 5001,
MakeRoutable = 1, SessionID = 1
```


상담원이 NOT_READY에서 NOT_ACTIVE로 표시되었습니다.

```
10:06:31:774 cgl1a-ctisvr Session 8: SkillGroupNumber:117497 SkillGroupID:5006
SkillGroupPriority:0 AgentState:NOT_ACTIVE
10:06:31:774 cgl1a-ctisvr Session 8: EventReasonCode:0 MRDID:5001 NumTasks:0 AgentMode:1
MaxTaskLimit:1 ICMAgentID:5001
```

```
10:06:31:774 cgl1a-ctisvr Session 5: SkillGroupNumber:2 SkillGroupID:5009
SkillGroupPriority:0 AgentState:NOT_ACTIVE
10:06:31:774 cgl1a-ctisvr Session 5: EventReasonCode:0 MRDID:5001 NumTasks:0 AgentMode:1
MaxTaskLimit:1 ICMAgentID:5001
```

여기서 NOT_ACTIVE는 상담원이 채팅을 수락할 준비가 되었음을 의미합니다. 사전 채팅 활동 이전에 "능동적으로" 작동하지 않습니다.

사례 2. ECE에서 사용 가능한 상담원에게 라우팅될 새 활동을 보내는 경우

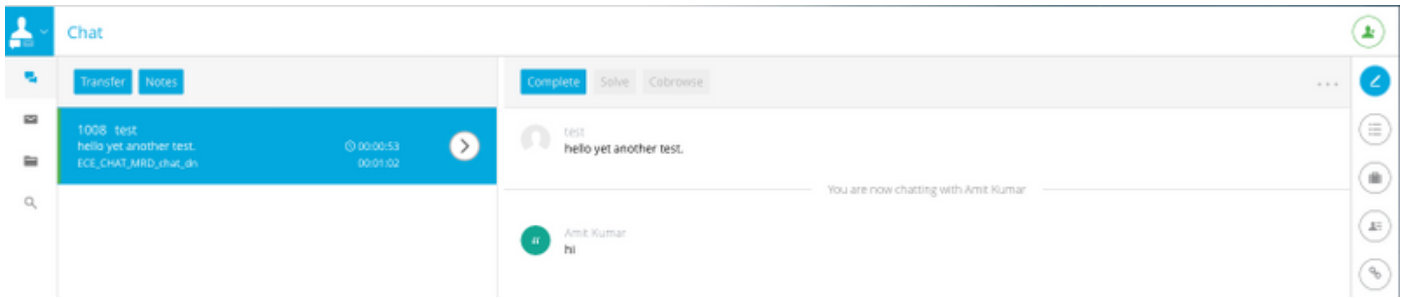

PIM logs :

1. NEW_TASK is received from ECE EASS

```

Events from June 13, 2019:
13:52:51:838 pg3a-pim2 Trace: Application->PG:
Message = NEW_TASK; Length = 78 bytes
  DialogueID = (11) Hex 0000000b
  SendSeqNo = (1) Hex 00000001
  MRDomainID = (5001) Hex 00001389
  PreviousTask = -1:-1:-1
  PreferredAgent = Undefined
  Service = (0) Hex 00000000
  CiscoReserved = (0) Hex 00000000
  ScriptSelector: chat_dn
  ServiceRequested = (0) Hex 00000000
ECC Variable Name: user.ece.activity.id
Value: 1012

```

(Notice the values of ECC variable Name and ScriptSelector)

2. INRCMSGNewCall/ RUN_APPLICATION_SCRIPT_REQ sent to Router :

```

13:52:51:838 pg3a-pim2 Trace: Send INRCMSGNewCall to Router : :
NEW_CALL RCID=5005 PID=5001 DID=11 DIDRelSeq#=1 GrpDelKey=5004 CRS(RtrDate=-1,RtrCID=-1)
RCKSeq#=-1 NICCallID={N/A} PGCallID={N/A} OperationCode=CLASSIC OperationFlags=COOP_NONE
CalledParty#=chat_dn CallingParty#= CED= MsgOrigin=1 RouteDevType=6 Originator=ece
NICCalledParty#= NetDelay=0 Priority=0 OrigType=0 atVRU=T CLIDRestrict=F PrefAGSTID=-1
MRDomainID=5001 LegacyPreCallMsgEnabled=F CID=0, ServiceReq=0 PV1= PV2= PV3= PV4= PV5= PV6= PV7=
PV8= PV9= PV10=
Name Type Index Value
user.ece.activity.id Scalar 1012
13:52:51:838 pg3a-pim2 Trace: MR_Peripheral::On_Router_RunScript
RUN_SCRIPT RCID=5005 PID=5001 DID=11 DIDRelSeq#=0 InvokeID=14 CRS(RtrDate=152834,RtrCID=406)
RCKSeq#=0 CallTypeID=5003 NICCalledParty#=chat_dn ScriptID=NVRUM_Script ScriptConfig=
CallingParty#= CED= PV1= PV2= PV3= PV4= PV5= PV6= PV7= PV8= PV9= PV10= EstimatedWaitTime=0
Name Type Index Value
user.ece.activity.id Scalar 1012
13:52:51:838 pg3a-pim2 Trace: PG->Application:
Message = RUN_APPLICATION_SCRIPT_REQ; Length = 80 bytes
  DialogueID = (11) Hex 0000000b
  SendSeqNo = (1) Hex 00000001
  InvokeID = (14) Hex 0000000e
  ScriptID: NVRUM_Script
  ScriptConfiguration:
  EstimatedWaitTime = (0) Hex 00000000
  Call Variable 1:
  Call Variable 2:
  Call Variable 3:
  Call Variable 4:

```

Call Variable 5:
Call Variable 6:
Call Variable 7:
Call Variable 8:
Call Variable 9:
Call Variable 10:
ECC Variable Name: user.ece.activity.id
Value: 1012

3. RUN_APPLICATION_SCRIPT_RESULT is received:

13:52:51:838 pg3a-pim2 Trace: Application->PG:
Message = RUN_APPLICATION_SCRIPT_RESULT; Length = 16 bytes

4. DO_THIS_WITH_TASK received:

13:52:51:838 pg3a-pim2 Trace: PG->Application:
Message = DO_THIS_WITH_TASK; Length = 90 bytes
DialogueID = (11) Hex 0000000b
SendSeqNo = (2) Hex 00000002
IcmTaskID = 152834:406: 1
SkillGroup = (5009) Hex 00001391
Service = Undefined
Agent = (5001) Hex 00001389
AgentInfo: 1004
Label:
ApplicationString2:
Call Variable 1:
Call Variable 2:
Call Variable 3:
Call Variable 4:
Call Variable 5:
Call Variable 6:
Call Variable 7:
Call Variable 8:
Call Variable 9:
Call Variable 10:
ECC Variable Name: user.ece.activity.id
Value: 1012

RTR logs :

NewCall is received:

13:52:51:838 ra-rtr Trace: (11 x 0 : 0 0) NewCall: CID=(152834,406), DN=chat_dn, ANI=, CED=,
RCID=5005, MRDID=5001, CallAtVRU=1, OpCode=0
13:52:51:838 ra-rtr Trace: RCKSeqNum=-1, NIC_DN=

Route Complete is received:

13:52:51:838 ra-rtr Trace: (11 x 0 : 0 0) RouteComplete:
13:52:51:838 ra-rtr Trace: Route: DN=chat_dn, ANI=, CED=, Label=
13:52:51:838 ra-rtr Trace: Route: CID=(152834,406), Labels=1

DeviceTargetPreCall is generated:

13:52:51:838 ra-rtr Trace: (11 x 0 : 0 0) DeviceTargetPreCall_V12: CID=(**152834,406**), PerID=5000,

SGSTID=5009, AGSTID=5001 NetworkCallFlags=0, InvokeID=343, GREET=
 13:52:51:838 ra-rtr Trace: DN=chat_dn, ANI=, CED=, CustDBProvidedDigits=, RouteID=5002,
 NetworkTargetID=0
 13:52:51:838 ra-rtr Trace: RCKSeqNum=0, DelayQTime=0, DelayRouterTime=0, SGDelayQTime=0
 13:52:51:838 ra-rtr Trace: CallGUID=, CustomerID=1
 13:52:51:838 ra-rtr Trace: LocationParamPKID=, LocationParamName=, SIPHeader=
 13:52:51:838 ra-rtr Trace: NIC_CalledPartyNumber=chat_dn
 13:52:51:838 ra-rtr Trace: PV1= PV2= PV3= PV4= PV5=
 13:52:51:838 ra-rtr Trace: PV6= PV7= PV8= PV9= PV10=
 13:52:51:838 ra-rtr Trace: (11 x 0 : 0 0) Connect: CID=(152834,406), EventSelect=0,
 ServiceType=0, RCID=5005, Label(s)=

From OPC logs:

NEW_CALL request

13:52:51:838 pg3a-opc Trace: SendINRCMessage: NEW_CALL RCID=5005 PID=5001 DID=11 DIDRelSeq#=1
 GrpDelKey=5004 CRS(RtrDate=-1,RtrCID=-1) RCKSeq#=-1 NICCallID={N/A} PGCallID={N/A}
 OperationCode=CLASSIC OperationFlags=COOP_NONE CalledParty#=chat_dn CallingParty#= CED=
 MsgOrigin=1 RouteDevType=6 Originator=ece NICCalledParty#= NetDelay=0 Priority=0 OrigType=0
 atVRU=T CLIDRestrict=F PrefAGSTID=-1 MRDomainID=5001 LegacyPreCallMsgEnabled=F CID=0,
 ServiceReq=0 PV1= PV2= PV3= PV4= PV5= PV6= PV7= PV8= PV9= PV10=

Name	Type	Index	Value
user.ece.activity.id	Scalar		1012

RUN_SCRIPT

13:52:51:838 pg3a-opc Trace: SendPIMINRCMessage: RUN_SCRIPT RCID=5005 PID=5001 DID=11
 DIDRelSeq#=0 InvokeID=14 CRS(RtrDate=152834,RtrCID=406) RCKSeq#=0 CallTypeID=5003
 NICCalledParty#=chat_dn ScriptID=NVRUM_Script ScriptConfig= CallingParty#= CED= PV1= PV2= PV3=
 PV4= PV5= PV6= PV7= PV8= PV9= PV10= EstimatedWaitTime=0

Name	Type	Index	Value
user.ece.activity.id	Scalar		1012

SCRIPT_RESP

13:52:51:838 pg3a-opc Trace: SendINRCMessage: SCRIPT_RESP RCID=5005 PID=5001 DID=11
 DIDRelSeq#=2 InvokeID=14 ResultCode=0 CED= PV1= PV2= PV3= PV4= PV5= PV6= PV7= PV8= PV9= PV10=

Name	Type	Index	Value
user.ece.activity.id	Scalar		1012

CONNECT is generated

13:52:51:838 pg3a-opc Trace: SendPIMINRCMessage: CONNECT RCID=5005 PID=5001 DID=11 DIDRelSeq#=1
 CRS(RtrDate=152834,RtrCID=406) RCKSeq#=0 ErrorCode=0 TRTargetID=-1 CorrID= EventSel=0 SvcType=0
 NICCallID={N/A} PGCallID={N/A}
 OperationCode=CLASSIC OperationFlags=COOP_NONE NetworkTransferEnabled=F **NICCalledParty#=chat_dn**
SGSTID=5009 SvcSTID=-1 AGSTID=5001 **AGInfo=1004, MRDID=5001** Interruptible=0 PV1= PV2= PV3= PV4=
 PV5= PV6= PV7= PV8= PV9= PV10=

Name	Type	Index	Value
user.ece.activity.id	Scalar		1012

**사례 3. 상담원이 채팅 작업을 수신하여 응답을 시작한 경우AgentState가 ACTIVE로 변경됩니다.이
 시나리오에서는 CTIServer가 아래에 로그를 보고합니다.**

CTIServer logs :

10:26:41:486 cgl-a-ctisvr Session 5: MsgType:AGENT_STATE_EVENT (MonitorID:0 PeripheralID:5000
SessionID:0x0
10:26:41:486 cgl-a-ctisvr Session 5: PeripheralType:EnterpriseAgent SkillGroupState:ACTIVE
StateDuration:0 SkillGroupNumber:2
10:26:41:486 cgl-a-ctisvr Session 5: SkillGroupID:5009 SkillGroupPriority:0 AgentState:ACTIVE
EventReasonCode:0 MRDID:5001

OPC logs:

10:26:41:486 pgl-a-opc Trace: RemoveFromSkillGroupStats: AGSTID=5001 Periph#=1011 SGSTID=5009,
SG#=2 State=AS_RESERVED AgentObj=0x4640040
10:26:41:486 pgl-a-opc Trace: AddToSkillGroupStats: AGSTID=5001 Periph#=1011 SGSTID=5009, SG#=2
State=AS_ACTIVE AgentObj=0x4640040
10:26:41:486 pgl-a-opc Trace: SetAgentState: ASTID=5001 Periph#=1011 MRDomainID=5001 SGSTID=5009
SG#=2(0x2) OldState=AS_RESERVED NewState=AS_ACTIVE Duration=0 CurLine=-1 ReasonCode=0
AgentObj=0x4640040